

Nidec

Power



LSA 47.3

Low Voltage Alternator - 4 poles

410 to 660 kVA - 50 Hz / 510 to 825 kVA - 60 Hz

Electrical and mechanical data

LERROY-SOMER[™]

LSA 47.3

The best of performance

The Leroy-Somer™ LSA 47.3 alternator has been designed to offer you the best power generation performances. With its meticulous design and optimized architecture, the LSA 47.3 strikes the perfect balance between compactness, reliability, performance and longevity.

Whatever your application, the Leroy-Somer™ LSA 47.3 alternator will meet your needs and will adapt to all situations.

Standards

The Leroy-Somer™ LSA 47.3 alternator meets all key international standards and regulations such as IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA C22.2 n°100-14, UL 1446, UL 1004-1 and UL 1004-4.

EC, UKCA, CMIM, CSA, UL 1446, UL recognized and UL listed declarations and certifications are available for the LSA 47.3.

The standards IEC 61000-6-2, IEC 61000-6-3, IEC 61000-6-4, VDE 0875G, VDE 0875N and EN 55011 allow compliance with group 1 class A for the European zone.

The Leroy-Somer™ LSA 47.3 alternator is designed, manufactured and marketed in an ISO 9001 and ISO 14001 quality assurance environment.

Electrical characteristics and performances

- Class H insulation
- 2/3 pitch winding, standard 12-wire (6) reconnectable
- Voltage range:
 - 50 Hz: 220V - 240V and 380V - 415V (440V)
 - 60 Hz: 208V - 240V and 380V - 480V
- High efficiency and motor starting capacity
- Other voltages are possible with optional adapted windings:
 - 50 Hz: 440V (no. 7), 500V (no. 9), 550V (no. 22 or 23), 600V (no. 22 or 23), 690V (no. 10 or 52)
 - 60 Hz: 380V and 416V (no. 8), 600V (no. 9), 690V (no. 22 or 23)

Excitation and regulation system

Excitation system				Regulation options		
AVR	SHUNT	AREP (option)	PMG (option)	C.T. Current transformer for paralleling	Mains paralleling	Remote voltage potentiometer
R250	Standard					√
D350	Option	Standard	Standard	√*		√
D550	Option	Option	Option	√*	√	√

*: only with AREP or PMG

3-phase sensing is included as a standard with digital regulators.

Protection system and options

- Degree of protection: IP 23
- Complete winding protection for clean environments with relative humidity $\leq 95\%$, including indoor marine environments
- Options:
 - Filters on air inlet: derating 5%
 - Filters on air inlet and air outlet (IP 44): derating 10%
 - Reinforced winding protection for harsh environments and relative humidity greater than 95%
 - Space heater
 - Thermal protection for stator windings and shields

Mechanical construction

- Compact and rigid assembly to better withstand generator vibrations
- Steel frame
- Cast iron flanges and shields
- Two-bearing and single-bearing versions designed to be suitable for engines on the market
- Half-key balancing
- Greased for life bearings, regreasable bearings (optional)
- Standard direction of rotation: clockwise when looking at the drive end view (for anti-clockwise, derate the machine by 5%)

Terminal box design

- Easy access to the voltage regulator and to the connections
- Possible inclusion of accessories for paralleling, protection and measurement
- 9-way terminal block for voltage reconnection

LSA 47.3 - 410 to 660 kVA - 50 Hz / 510 to 825 kVA - 60 Hz

General characteristics

Insulation class	H	Excitation system	SHUNT	AREP / PMG
Winding pitch	2/3 (wind. 6)	AVR type	R250	D350
Number of wires	12	Voltage regulation (*)	± 0.5%	± 0.25%
Protection	IP 23	Short-circuit current	-	300% (3 IN) : 10s
Altitude	≤ 1 000 m	Total Harmonic Distortion THD (**)	no load < 2.5% - on load < 2%	
Overspeed	2 250 R.P.M.	Waveform: NEMA = TIF (**)	< 50	
Air flow	0.9 m³/s (50 Hz) / 1.1 m³/s (60 Hz)	Waveform: I.E.C. = THF (**)	< 2%	

(*) Steady state (**) Total harmonic distortion between phases, no-load or on-load (non-distorting)

Ratings 50 Hz - 1 500 R.P.M.







kVA / kW - P.F. = 0.8																	
Duty / T° C		Continuous / 40 °C				Continuous / 40 °C				Stand-by / 40 °C				Stand-by / 27 °C			
Class / T° K		H / 125° K				F / 105° K				H / 150° K				H / 163° K			
Phase		3 ph.				3 ph.				3 ph.				3 ph.			
Y		380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V
Δ		220V	230V	240V		220V	230V	240V		220V	230V	240V		220V	230V	240V	
YY			200V		220V		200V		220V		200V		220V		200V		220V
LSA 47.3 S4	kVA	410	410	410	400	375	375	375	364	435	435	435	424	450	450	450	440
	kW	328	328	328	320	300	300	300	291	348	348	348	339	360	360	360	352
LSA 47.3 S5	kVA	455	455	455	445	415	415	415	405	480	480	480	472	500	500	500	490
	kW	364	364	364	356	332	332	332	324	384	384	384	378	400	400	400	392
LSA 47.3 M7	kVA	500	500	500	490	465	465	465	449	550	550	550	519	570	570	570	539
	kW	400	400	400	392	372	372	372	359	440	440	440	415	456	456	456	431
LSA 47.3 M8	kVA	550	550	550	540	500	500	500	491	585	585	585	572	600	600	600	594
	kW	440	440	440	432	400	400	400	393	468	468	468	458	480	480	480	475
LSA 47.3 L9	kVA	600	600	600	500	545	545	545	455	635	635	635	530	660	660	660	550
	kW	480	480	480	400	436	436	436	364	508	508	508	424	528	528	528	440
LSA 47.3 L10	kVA	645	660	660	630	587	600	600	573	684	730	730	668	710	745	745	693
	kW	516	528	528	504	470	480	480	458	547	584	584	534	568	596	596	554

Ratings 60 Hz - 1 800 R.P.M.

kVA / kW - P.F. = 0.8																	
Duty / T° C		Continuous / 40 °C				Continuous / 40 °C				Stand-by / 40 °C				Stand-by / 27 °C			
Class / T° K		H / 125° K				F / 105° K				H / 150° K				H / 163° K			
Phase		3 ph.				3 ph.				3 ph.				3 ph.			
Y		380V	416V	440V	480V	380V	416V	440V	480V	380V	416V	440V	480V	380V	416V	440V	480V
Δ		220V	240V			220V	240V			220V	240V			220V	240V		
YY			208V	220V	240V		208V	220V	240V		208V	220V	240V		208V	220V	240V
LSA 47.3 S4	kVA	450	480	500	512	410	442	455	465	475	513	533	550	500	530	550	581
	kW	360	384	400	410	328	354	364	372	380	410	426	440	400	424	440	465
LSA 47.3 S5	kVA	475	510	531	570	441	473	493	520	505	543	566	605	527	562	585	625
	kW	380	408	425	456	353	378	394	416	404	434	453	484	422	450	468	500
LSA 47.3 M7	kVA	562	610	625	625	523	566	581	590	600	651	669	680	625	668	690	700
	kW	450	488	500	500	418	453	465	472	480	521	535	544	500	534	552	560
LSA 47.3 M8	kVA	562	610	630	690	523	566	587	632	600	651	672	730	625	671	705	750
	kW	450	488	504	552	418	453	470	506	480	521	538	584	500	537	564	600
LSA 47.3 L9	kVA	602	661	685	750	556	609	634	685	643	707	734	795	667	728	763	825
	kW	482	529	548	600	445	487	507	548	514	566	587	636	534	582	610	660
LSA 47.3 L10	kVA	650	715	755	825	590	650	685	750	690	760	800	875	720	785	830	910
	kW	520	572	604	660	472	520	548	600	552	608	640	700	576	628	664	728

Paralleling with the grid or between alternators may require some specific configuration. Please make sure to consider the rating table (ref. 6627) when alternator selection.

Efficiencies 400V - 50 Hz (— P.F.: 0.8) (--- P.F.: 1)

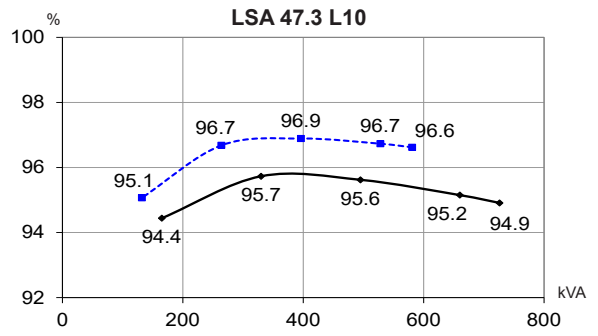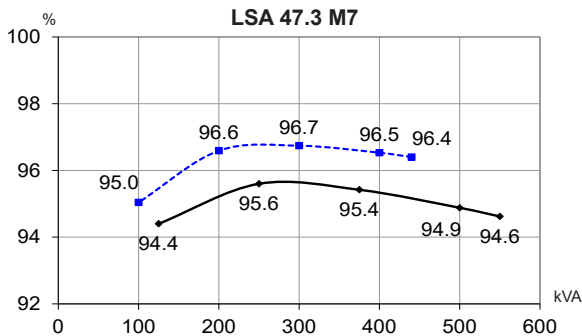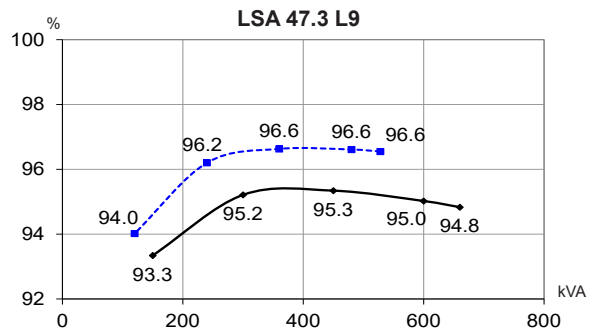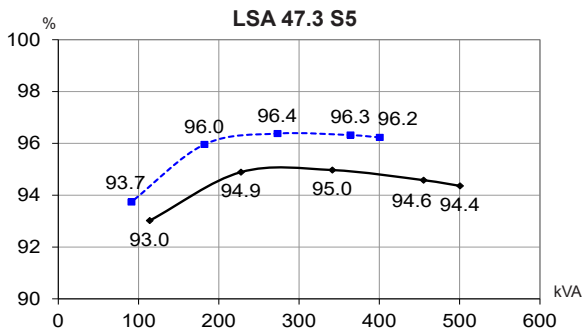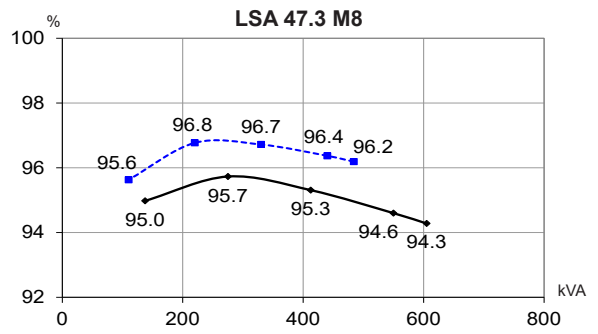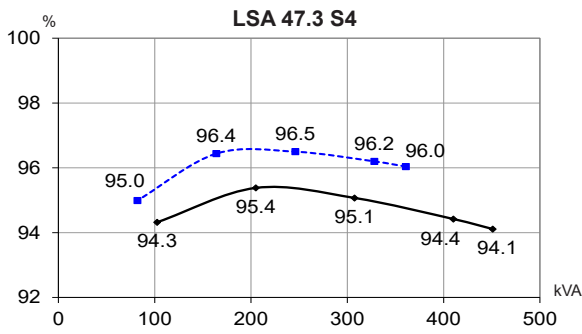


Reactances (%). Time constants (ms) - Class H / 400 V

	S4	S5	M7	M8	L9	L10
Kcc Short-circuit ratio	0.29	0.51	0.35	0.27	0.55	0.41
Xd Direct-axis synchronous reactance unsaturated	402	302	366	432	294	343
Xq Quadrature-axis synchronous reactance unsaturated	205	154	187	220	150	175
T'do No-load transient reactance saturated	2 068	2 030	1 968	1 931	1 881	1 857
X'd Direct-axis transient reactance saturated	19.4	14.8	18.6	22.3	15.6	18.5
T'd Short-circuit transient time constant	100	100	100	100	100	100
X''d Direct-axis subtransient reactance saturated	11.2	8.5	10.7	12.8	9	10.6
T''d Subtransient time constant	10	10	10	10	10	10
X''q Quadrature-axis subtransient reactance saturated	12.6	10.1	13.6	17	12.5	15.2
Xo Zero sequence reactance	0.81	0.62	0.77	0.93	0.65	0.77
X2 Negative sequence reactance saturated	11.93	9.34	12.17	14.96	10.78	12.92
Ta Armature time constant	15	15	15	15	15	15


Other class H / 400 V data

	S4	S5	M7	M8	L9	L10
io (A) No-load excitation current (SHUNT / AREP)	0.68	1.07	0.79	0.68	1.13	0.92
ic (A) On-load excitation current (SHUNT / AREP)	3.1	3.36	3.21	3.34	3.48	3.44
uc (V) On-load excitation voltage (SHUNT / AREP)	32.4	35	33.5	34.8	36.1	35.6
ms Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500	500
kVA Start ($\Delta U = 20\%$ cont. or 30% trans.) SHUNT	1 055	1 178	1 240	1 237	1 480	1 615
kVA Start ($\Delta U = 20\%$ cont. or 30% trans.) AREP	1 269	1 443	1 490	1 486	1 805	1 968
% Transient ΔU (on-load 4/4) SHUNT - P.F.: 0.8 _{LAG}	12.8	10.3	15.5	14.3	15.7	12.1
% Transient ΔU (on-load 4/4) AREP - P.F.: 0.8 _{LAG}	11	8.9	13.9	12.2	14.3	10.3
W No-load losses	4 011	5 871	4 911	4 544	7 414	6 486
W Heat dissipation	19 374	20 840	21 557	25 084	25 152	26 900


Transient voltage variation 400 V - 50 Hz

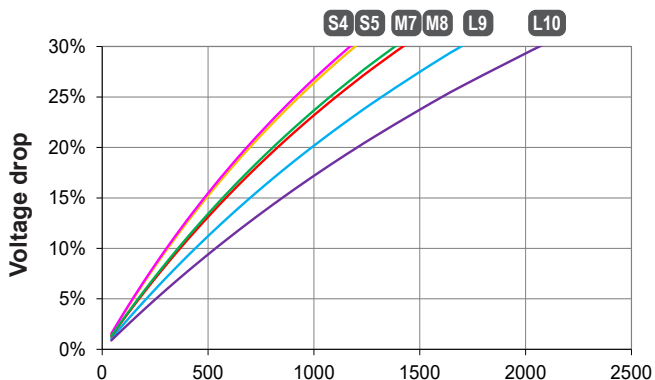


Phase loading (SHUNT) - kVA at P.F. = 0.8

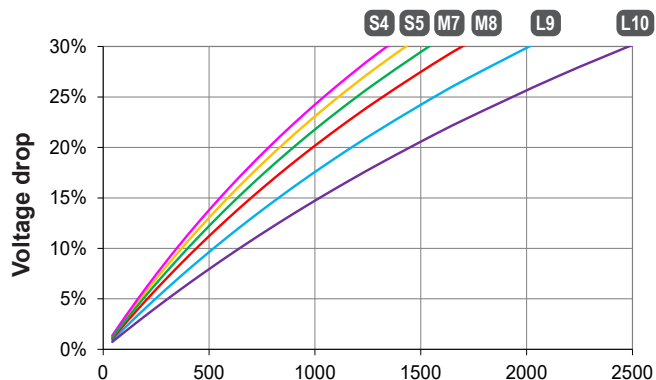


Phase loading (AREP/PMG) - kVA at P.F. = 0.8

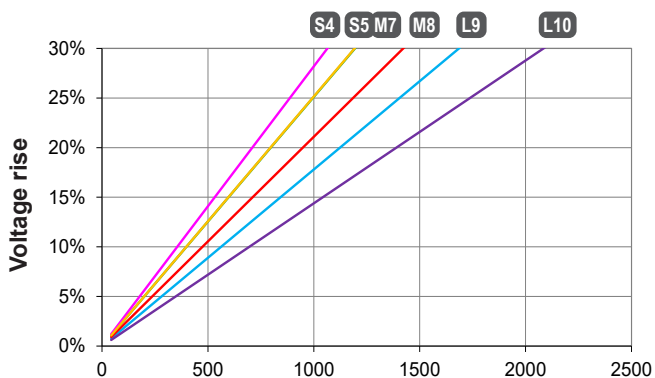


Load shedding (SHUNT) - kVA at P.F. = 0.8

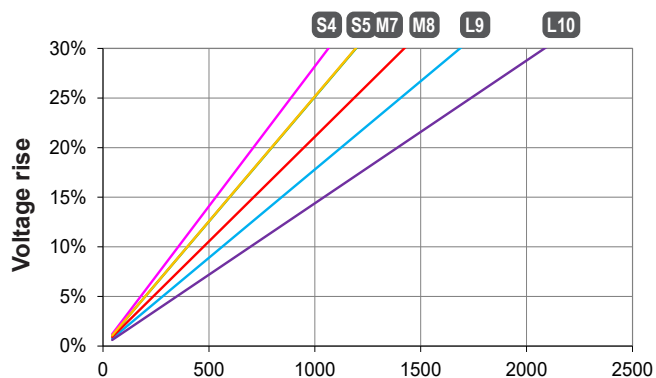

Load shedding (AREP/PMG) - kVA at P.F. = 0.8

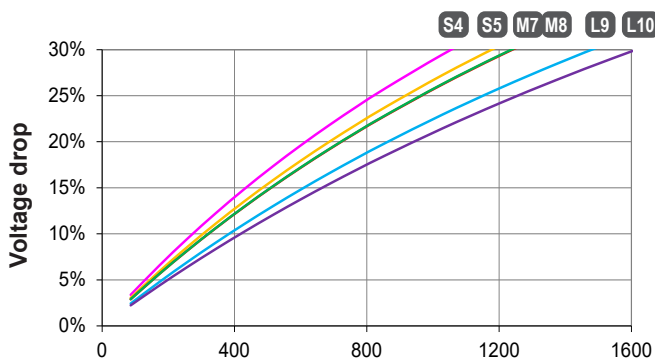







Motor starting (SHUNT)
Locked rotor kVA at P.F. = 0.6

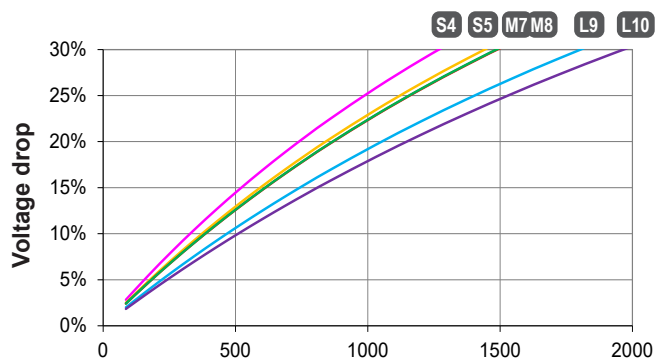

Motor starting (AREP/PMG)
Locked rotor kVA at P.F. = 0.6

- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.6$
- 2) For voltages other than 400V (Y), 230V (Δ) at 50 Hz, then kVA must be multiplied by $(400/U)^2$ or $(230/U)^2$.

Efficiencies 480 V - 60 Hz (— P.F.: 0.8) (--- P.F.: 1)

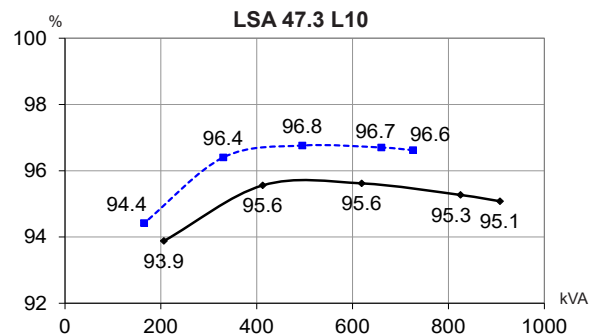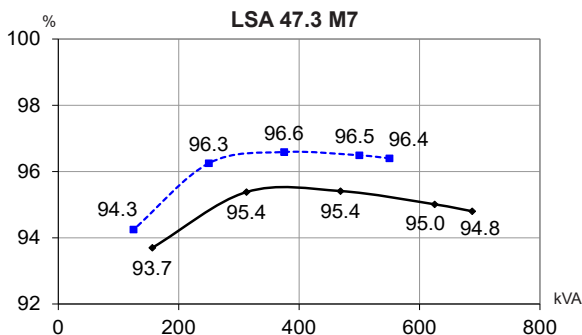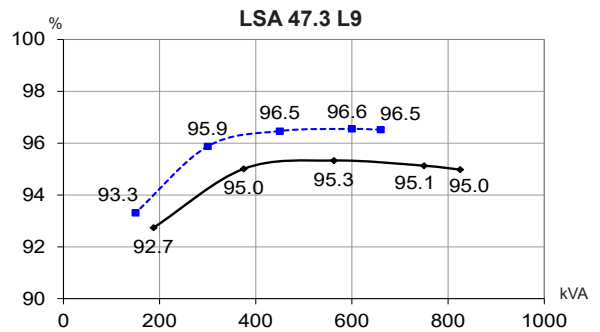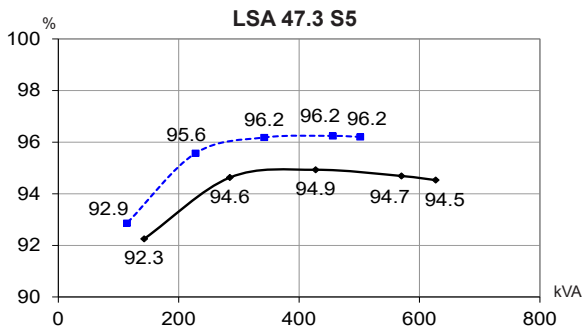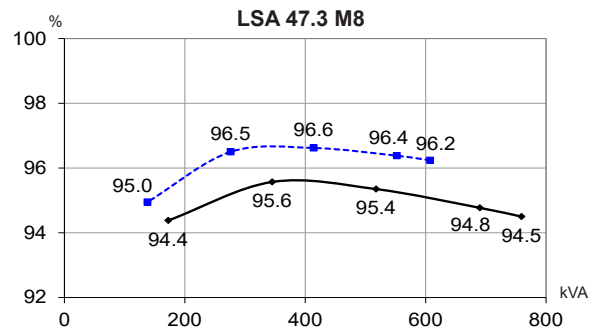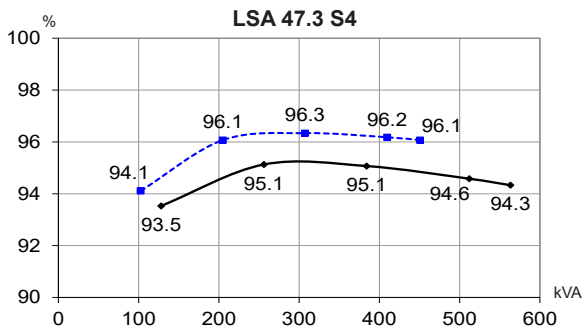


Reactances (%). Time constants (ms) - Class H / 480 V

	S4	S5	M7	M8	L9	L10
Kcc Short-circuit ratio	0.28	0.49	0.33	0.26	0.51	0.39
Xd Direct-axis synchronous reactance unsaturated	417	315	382	452	309	361
Xq Quadrature-axis synchronous reactance unsaturated	212	160	194	230	157	184
T'do No-load transient time constant	2 068	2 030	1 968	1 931	1 881	1 857
X'd Direct-axis transient reactance saturated	20.1	15.5	19.4	23.4	16.4	19.4
T'd Short-circuit transient time constant	100	100	100	100	100	100
X''d Direct-axis subtransient reactance saturated	11.5	8.9	11.1	13.4	9.4	11.1
T''d Subtransient time constant	10	10	10	10	10	10
X''q Quadrature-axis subtransient reactance saturated	13.1	10.5	14.2	17.8	13.2	15.9
Xo Zero sequence reactance	0.84	0.64	0.8	0.97	0.68	0.81
X2 Negative sequence reactance saturated	12.35	9.75	12.68	15.64	11.33	13.58
Ta Armature time constant	15	15	15	15	15	15


Other class H / 480 V data

io (A) No-load excitation current (SHUNT / AREP)	0.68	1.07	0.79	0.68	1.11	0.91
ic (A) On-load excitation current (SHUNT / AREP)	3.17	3.42	3.28	3.43	3.51	3.49
uc (V) On-load excitation voltage (SHUNT / AREP)	33.2	35.8	34.3	35.8	36.6	36.3
ms Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500	500
kVA Start ($\Delta U = 20\%$ cont. or 30% trans.) SHUNT	1 268	1 456	1 495	1 482	1 849	2 015
kVA Start ($\Delta U = 20\%$ cont. or 30% trans.) AREP	1 526	1 791	1 783	1 780	2 262	2 460
% Transient ΔU (on-load 4/4) SHUNT - P.F.: 0.8 _{LAG}	13.2	10.7	15.9	14.8	16.2	12.6
% Transient ΔU (on-load 4/4) AREP - P.F.: 0.8 _{LAG}	11.3	9.2	14.2	12.7	14.7	10.7
W No-load losses	6 196	8 711	7 429	6 931	10 718	9 520
W Heat dissipation	23 456	25 534	26 224	30 403	30 686	32 721


Transient voltage variation 480 V - 60 Hz

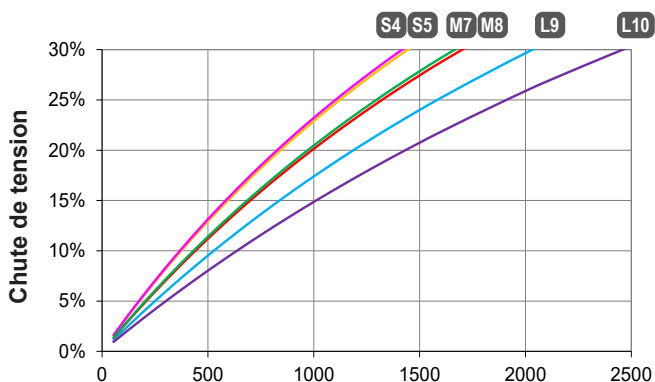


Mise en charge (SHUNT) - kVA à Cos Φ 0.8

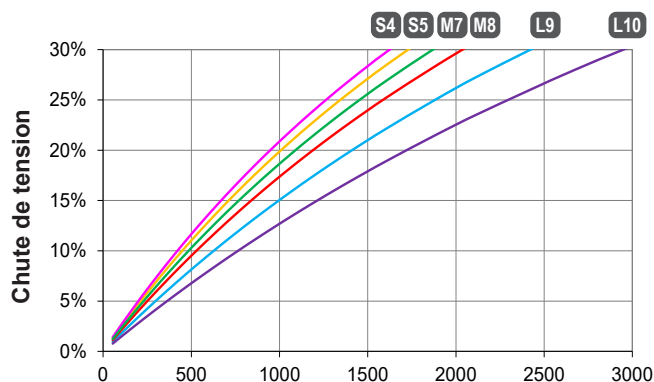


Mise en charge (AREP/PMG) - kVA à Cos Φ 0.8

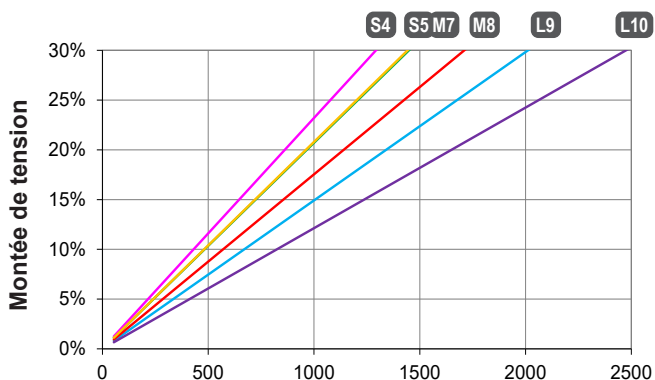


Délestage (SHUNT) - kVA à Cos Φ 0.8

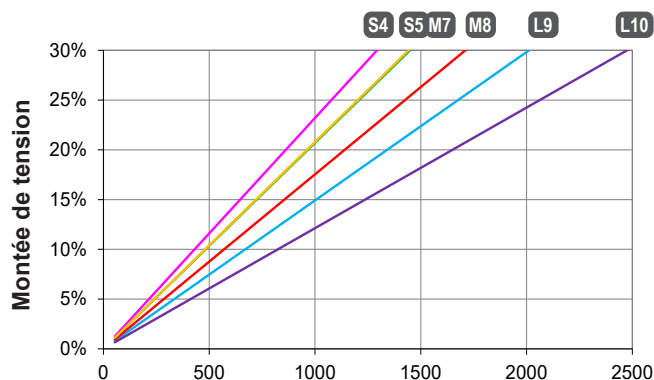

Délestage (AREP/PMG) - kVA à Cos Φ 0.8

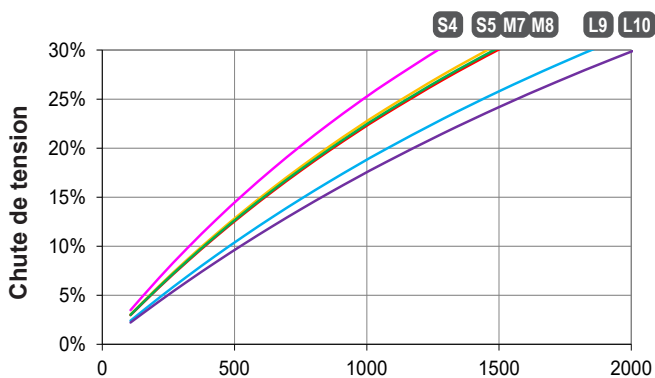

Démarrage des moteurs (SHUNT)
kVA rotor bloqué à Cos Φ 0.6

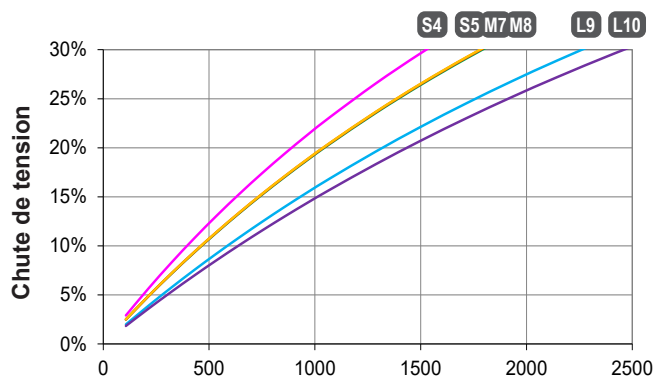


Démarrage des moteurs (AREP/PMG)
kVA rotor bloqué à Cos Φ 0.6

- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.6$
- 2) For voltages other than 480V (Y), 277V (Δ), 240V (YY) at 60 Hz, then kVA must be multiplied by $(480/U)^2$ or $(277/U)^2$ or $(240/U)^2$.

3-phase short-circuit curves at no load and rated speed (star connection Y)


LSA 47.3 S4

Symmetrical —
Asymmetrical - - -

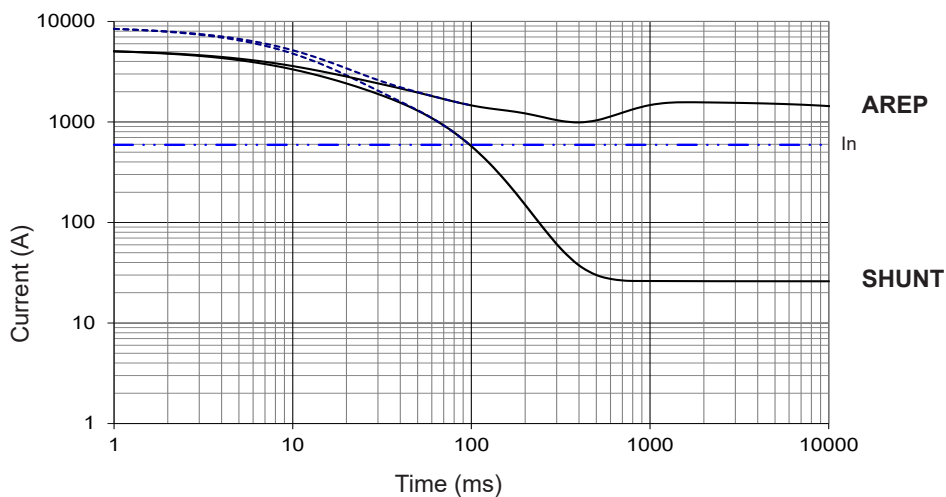


LSA 47.3 S5

Symmetrical —
Asymmetrical - - -

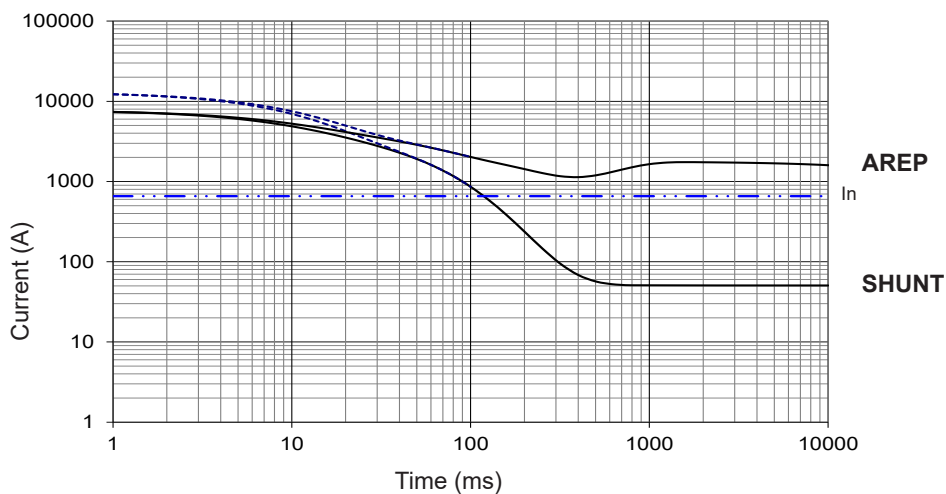

LSA 47.3 M7

Symmetrical —
Asymmetrical - - -

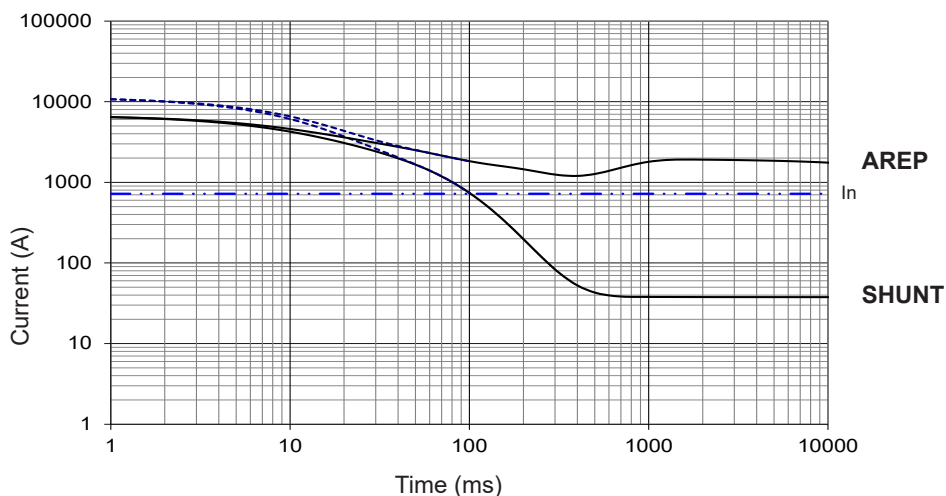

Influence due to connection

Curves shown are for star (Y) connection.


For other connections, use the following multiplication factors:

- Series delta : current value x 1.732 - Parallel star : current value x 2

3-phase short-circuit curves at no load and rated speed (star connection Y)


LSA 47.3 M8

Symmetrical —
Asymmetrical - - -

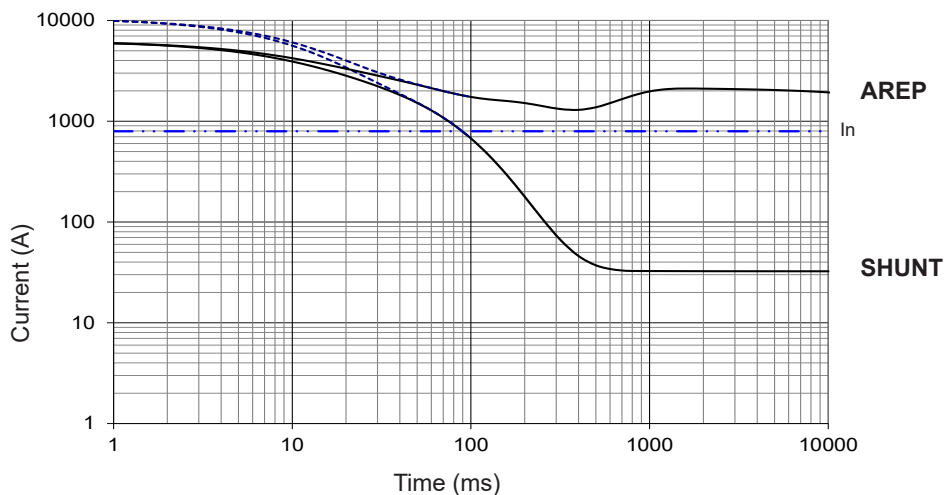


LSA 47.3 L9

Symmetrical —
Asymmetrical - - -

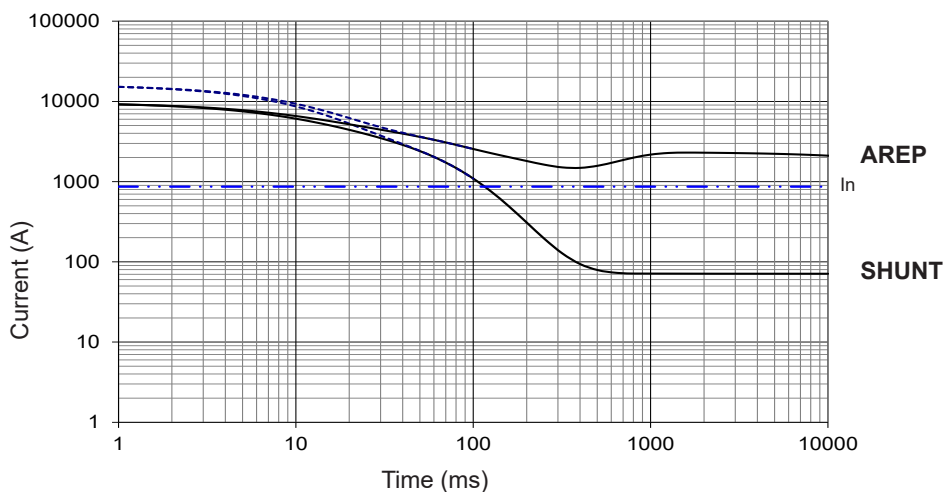

LSA 47.3 L10

Symmetrical —
Asymmetrical - - -

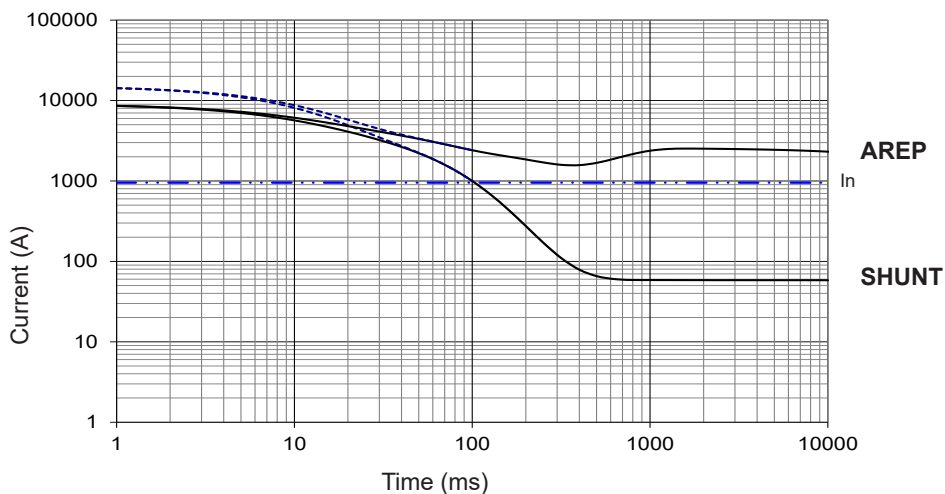


Influence due to short-circuit

Curves are based on a three-phase short-circuit.

For other types of short-circuit, use the following multiplication factors.

	3-phase	2-phase L/L	1-phase L/N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP/PMG)	10 sec.	5 sec.	2 sec.

Single-bearing dimensions

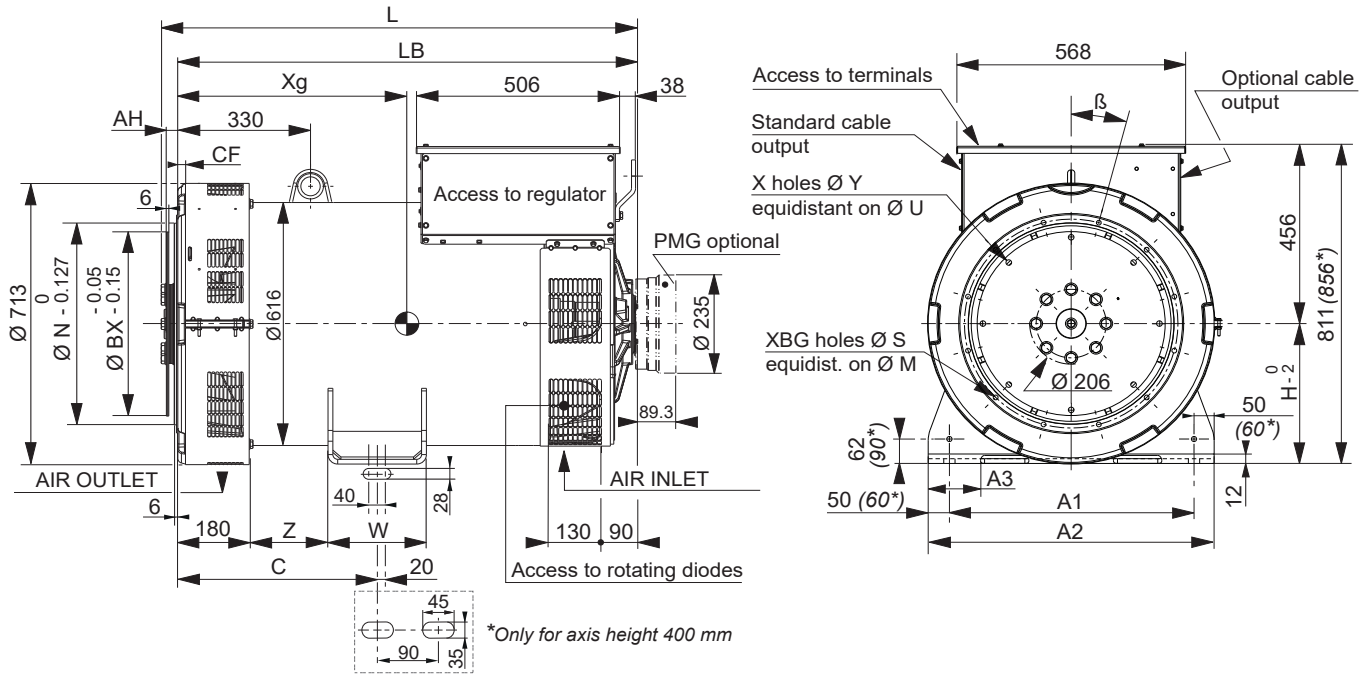

Dimensions (mm) and weight (kg)				
Type	L without PMG maxi*	LB	Xg	Weight
LSA 47.3 S4	1 108	1 056	479	1 110
LSA 47.3 S5	1 108	1 056	485	1 142
LSA 47.3 M7	1 208	1 156	515	1 230
LSA 47.3 M8	1 208	1 156	524	1 284
LSA 47.3 L9	1 228	1 176	543	1 366
LSA 47.3 L10	1 228	1 176	552	1 414

* L maxi = LB + AH maxi + 13

Shaft height (mm)		
	Standard	Option*
H	355	400
C	530	560
A1	610	686
A2	710	786
W	244	259
Z	228	295.5
A3	-	110


* Available only for L10

Coupling				
	Flex plate	11 ½	14	18
Flange S.A.E 1	X	X		
Flange S.A.E ½			X	
Flange S.A.E 0			X	X

Flange (mm)						
S.A.E.	N	M	XBG	S	β°	CF
1	511.175	530.225	12	12	15°	15
½	584.2	619.125	12	14	15°	22
0	647.7	679.45	16	14	11° 15'	42

Flex plate (mm)					
S.A.E.	BX	U	X	Y	AH
11 ½	352.42	333.38	8	11	39.6
14	466.72	438.15	8	14	25.4
18	571.5	542.92	6	17	15.7


Torsional analysis data

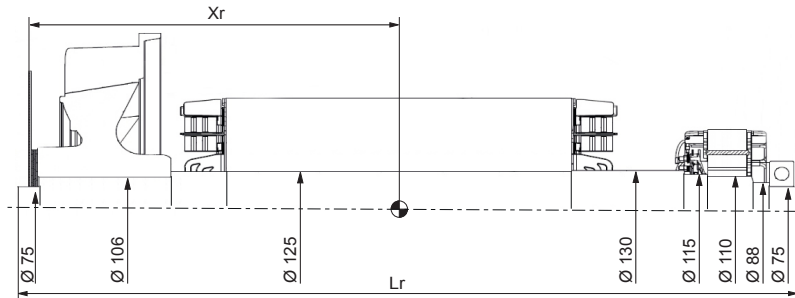

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm²): (4J = MD²)												
Flex plate	S.A.E. 11 ½				S.A.E. 14				S.A.E. 18			
	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J
LSA 47.3 S4	465	1 081	443	7.1	450	1 070	444	7.18	439	1 070	444	7.46
LSA 47.3 S5	473	1 081	456	7.3	457	1 070	456	7.41	447	1 070	457	7.68
LSA 47.3 M7	502	1 181	491	7.8	487	1 170	492	7.88	477	1 170	492	8.14
LSA 47.3 M8	512	1 181	517	8.2	498	1 170	517	8.37	487	1 170	518	8.54
LSA 47.3 L9	533	1 201	545	8.7	518	1 190	546	8.83	508	1 190	546	9.09
LSA 47.3 L10	544	1 201	563	9.1	529	1 190	564	9.18	519	1 190	564	9.44


NOTE : Dimensions are for information only and may be subject to modifications. Contractual 2D drawings can be downloaded from the Nidec Power website, 3D drawing files are available upon request. The torsional analysis of the transmission is imperative. All values are available upon request.

Two-bearing dimensions

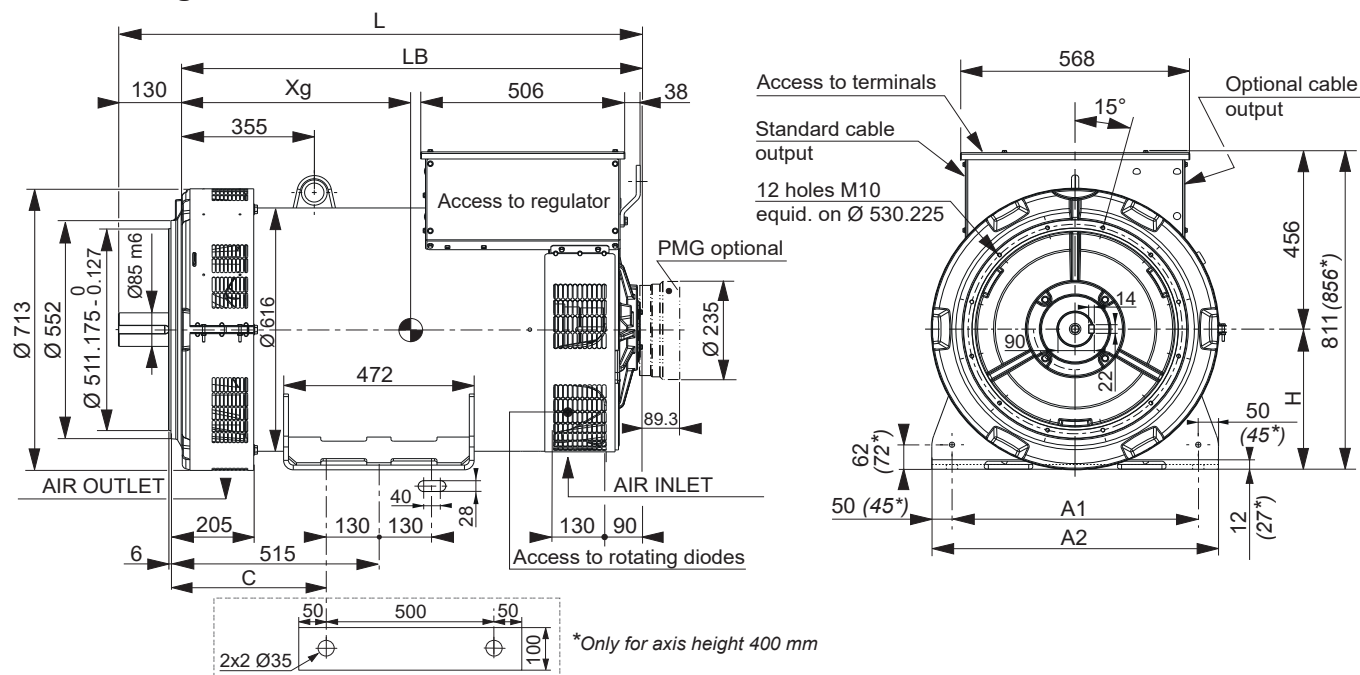

Dimensions (mm) and weight (kg)					Shaft height (mm)		
Type	L without PMG	LB	Xg	Weight	Standard		Option*
LSA 47.3 S4	1 211	1 081	473	1 125	H	355 ⁰ ₂	400 ⁰ ₁
LSA 47.3 S5	1 211	1 081	479	1 157	A1	610	686
LSA 47.3 M7	1 311	1 181	510	1 245	A2	710	786
LSA 47.3 M8	1 311	1 181	519	1 299	C	-	290
LSA 47.3 L9	1 331	1 201	537	1 381	* Available only for L10		
LSA 47.3 L10	1 331	1 201	547	1 429			

Torsional analysis data

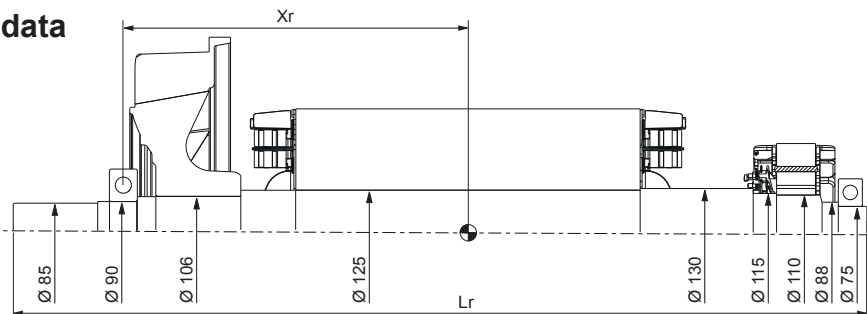

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm ²): (4J = MD ²)				
Type	Xr	Lr	M	J
LSA 47.3 S4	430	1 194	422	6.80
LSA 47.3 S5	437	1 194	435	7.03
LSA 47.3 M7	466	1 294	470	7.51
LSA 47.3 M8	477	1 294	496	8
LSA 47.3 L9	497	1 314	524	8.46
LSA 47.3 L10	508	1 314	542	8.81

NOTE : Dimensions are for information only and may be subject to modifications. Contractual 2D drawings can be downloaded from the Nidec Power website, 3D drawing files are available upon request.
The torsional analysis of the transmission is imperative. All values are available upon request.



www.nidecpower.com

Connect with us at:



© 2026 Moteurs Leroy-Somer SAS. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Moteurs Leroy-Somer SAS have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Headquarters: Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France. Share Capital: 32,239,235 €, RCS Angoulême 338 567 258.