


**Nidec**

Power

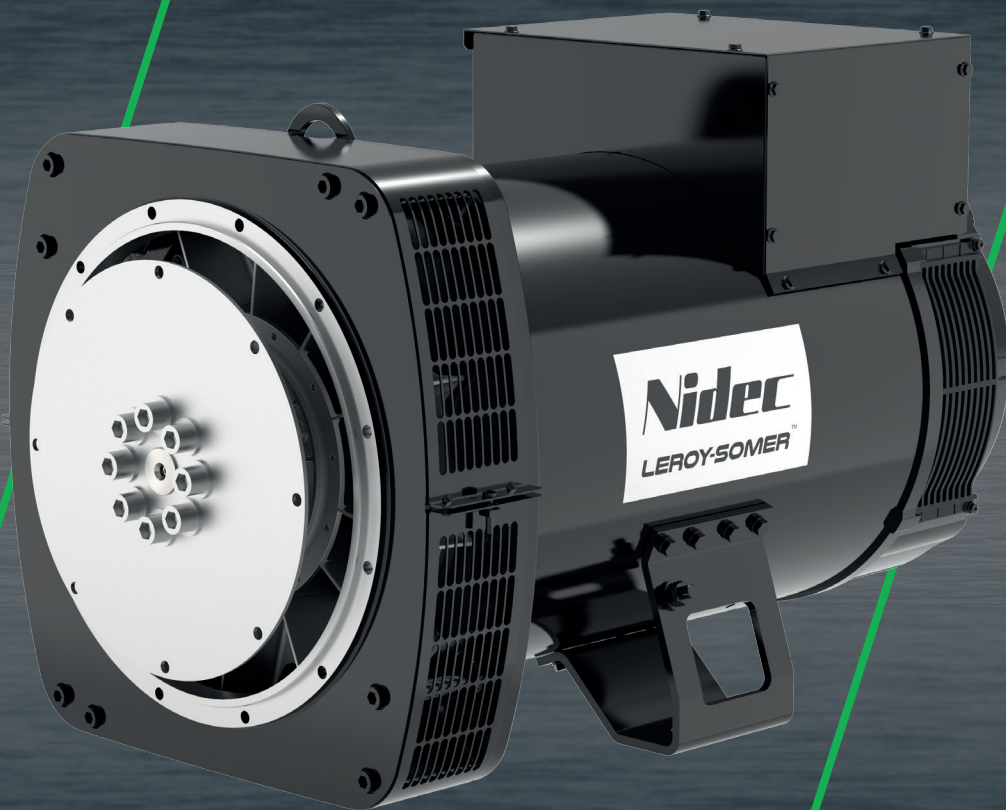

# TAL 044

Low Voltage Alternator - 4 poles

57 to 200 kVA - 50 Hz / 80 to 250 kVA - 60 Hz

Electrical and mechanical data

**LEROY-SOMER**<sup>™</sup>

## The best of performance

The Leroy-Somer™ TAL 044 alternator has been designed to offer you the best power generation performances. With its meticulous design and optimized architecture, the TAL 044 strikes the perfect balance between compactness, reliability, performance and longevity.

Whatever your application, the Leroy-Somer™ TAL 044 alternator will meet your needs and will adapt to all situations.

## Standards

The Leroy-Somer™ TAL 044 alternator meets all key international standards and regulations such as IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA C22.2 n°100-14, UL 1446, UL 1004-1 and UL 1004-4. EC, UKCA, CMIM, UL 1446, UL recognized and UL listed declarations and certifications are available for the TAL 044.

The standards IEC 61000-6-2, IEC 61000-6-3, IEC 61000-6-4, VDE 0875G, VDE 0875N and EN 55011 allow compliance with group 1 class A for the European zone.

The Leroy-Somer™ TAL 044 alternator is designed, manufactured and marketed in an ISO 9001 and ISO 14001 quality assurance environment.

## Electrical characteristics and performances

- Class H insulation
- Shunt excitation
- Low voltage winding:
  - Three-phase 50 Hz: 220V - 240V and 380V - 415V (440V)  
60 Hz: 208V - 240V and 380V - 480V
  - Single-phase 50 Hz: 230V  
60 Hz: 240V
- 4-terminal plates in 6-wire version
- Optimized performance

## Excitation and regulation system

	Excitation system				Regulation options		
	AVR	SHUNT	AREP+ (option)	PMG (option)	ULc/us	Remote voltage potentiometer	C.T. Current transformer for paralleling
Three-phase 6-wire	R120	Standard					
	R150	Option				√	
	R180		Standard	Standard		√	√
	D350	Option	Option	Option	√	√	√*
Three-phase 12-wire	R120	Standard					
	R250	Option			√	√	
	R180		Standard	Standard		√	√
	D350	Option	Option	Option	√	√	√*
Single-phase	R121	Standard				√	
	R251	Option			√	√	

\*: only with AREP+ or PMG

## Protection system and options

- Degree of protection: IP 23
- Complete winding protection for non-harsh environment with relative humidity ≤ 95%
- Options:
  - Three-phase 12-wire with 8-terminal plates
  - AREP+ or PMG excitation
  - ULc/us
  - Customized painting (unpainted machine as standard)
  - Space heater
  - Flying leads
  - Droop kit for alternator paralleling
  - Dedicated single-phase
  - Stator sensors
  - Winding 8 optimized for three-phase 380V / 416V - 60Hz
  - Reinforced winding protection for harsh environments and relative humidity greater than 95% (system 2 - 4):  
for TAL 044 K apply a derating coefficient of 0.97

## Mechanical construction

- Compact and rugged assembly to withstand engine vibrations
- Steel frame
- Aluminum flanges and shields
- Single-bearing design compatible with most diesel engines
- Greased for life bearings
- Direction of rotation: clockwise and counterclockwise without derating

## Terminal box design

- Easy access to AVR and terminals
- Possibility of current transformer for parallel operation



# TAL 044 - Three-phase 70 to 200 kVA - 50 Hz / 88 to 250 kVA - 60 Hz

## General characteristics

Insulation class	H	Excitation system 6-wire	SHUNT	AREP+ / PMG
Winding pitch	2/3 (wind.6S - 6-wire / wind.6 - 12-wire)	AVR type	R120	R180
Number of wires	6 (12 option)	Excitation system 12-wire (option)	SHUNT	AREP+ / PMG
Protection	IP 23	AVR type	R120	R180
Altitude	≤ 1 000 m	Voltage regulation (**)	± 1 %	± 0.5 %
Overspeed	2 250 R.P.M.	Total Harmonic Distortion THD (***) in no-load	< 2 %	
Air flow 50 Hz	0.29 m³/s	Total Harmonic Distortion THD (***) in linear load	< 5 %	
Air flow 60 Hz	0.34 m³/s	Waveform: NEMA = TIF (***)	< 50	
AREP+/PMG Short-circuit current = 2.7 In : 5 seconds (*)		Waveform: I.E.C. = FHT (***)	< 2%	

(\*) D350: 10 seconds (\*\*) Steady state (\*\*\*) Total harmonic distortion between phases, no-load or on-load (non-distorting)

## Ratings 50 Hz - 1 500 R.P.M.

kVA / kW - P.F. = 0.8																				
Duty / T° C	Continuous / 40 °C					Continuous / 40 °C					Stand-by / 40 °C					Stand-by / 27 °C				
Class / T° K	H / 125° K					F / 105° K					H / 150° K					H / 163° K				
Phase	3 ph.			1 ph.		3 ph.			1 ph.		3 ph.			1 ph.		3 ph.			1 ph.	
<b>Y</b>	380V	<b>400V</b>	415V	440V		380V	<b>400V</b>	415V	440V		380V	<b>400V</b>	415V	440V		380V	<b>400V</b>	415V	440V	
<b>Δ</b>	220V	<b>230V</b>	240V		230V	220V	<b>230V</b>	240V		230V	220V	<b>230V</b>	240V		230V	220V	<b>230V</b>	240V		230V
<b>YY (*)</b>	200V				220V	200V				220V	200V				220V	200V				220V
<b>ΔΔ (*)</b>					230V					230V					230V					230V
<b>TAL 044 A</b> kVA	70	<b>70</b>	70	63	42	64	<b>64</b>	64	57	38	74	<b>74</b>	74	67	45	77	<b>77</b>	77	69	46
kW	56	<b>56</b>	56	50	33.5	51	<b>51</b>	51	46	30.5	59	<b>59</b>	59	54	36	62	<b>62</b>	62	55	37
<b>TAL 044 B</b> kVA	80	<b>80</b>	80	72	48	73	<b>73</b>	73	66	44	85	<b>85</b>	85	76	51	88	<b>88</b>	88	79	53
kW	64	<b>64</b>	64	58	38.5	58	<b>58</b>	58	53	35	68	<b>68</b>	68	61	41	70	<b>70</b>	70	63	42
<b>TAL 044 C</b> kVA	90	<b>90</b>	90	81	54	82	<b>82</b>	82	74	49	95	<b>95</b>	95	86	57	100	<b>100</b>	100	89	59
kW	72	<b>72</b>	72	65	43	66	<b>66</b>	66	59	39	76	<b>76</b>	76	69	46	80	<b>80</b>	80	71	47
<b>TAL 044 D</b> kVA	100	<b>100</b>	100	90	60	91	<b>91</b>	91	82	55	106	<b>106</b>	106	95	64	110	<b>110</b>	110	99	66
kW	80	<b>80</b>	80	72	48	73	<b>73</b>	73	66	44	85	<b>85</b>	85	76	51	88	<b>88</b>	88	79	53
<b>TAL 044 E</b> kVA	125	<b>125</b>	125	113	67	114	<b>114</b>	114	103	61	133	<b>133</b>	133	120	71	138	<b>138</b>	138	124	74
kW	100	<b>100</b>	100	90	54	91	<b>91</b>	91	82	49	106	<b>106</b>	106	96	57	110	<b>110</b>	110	99	59
<b>TAL 044 H</b> kVA	135	<b>135</b>	135	122	73	123	<b>123</b>	123	111	66	143	<b>143</b>	143	129	77	150	<b>150</b>	150	134	80
kW	108	<b>108</b>	108	98	58	98	<b>98</b>	98	89	53	114	<b>114</b>	114	103	62	120	<b>120</b>	120	107	64
<b>TAL 044 J</b> kVA	150	<b>150</b>	150	135	80	137	<b>137</b>	137	123	73	159	<b>159</b>	159	143	85	165	<b>165</b>	165	149	88
kW	120	<b>120</b>	120	108	64	110	<b>110</b>	110	98	58	127	<b>127</b>	127	114	68	132	<b>132</b>	132	119	70
<b>TAL 044 K</b> kVA	165	<b>165</b>	165	138	88	150	<b>150</b>	150	126	80	175	<b>175</b>	175	150	93	182	<b>182</b>	182	157	97
kW	132	<b>132</b>	132	110	70	120	<b>120</b>	120	101	64	140	<b>140</b>	140	120	74	146	<b>146</b>	146	126	78
<b>TAL 044 L</b> kVA	180	<b>180</b>	180	171	90	164	<b>164</b>	164	156	82	191	<b>191</b>	191	181	95	200	<b>200</b>	200	188	99
kW	144	<b>144</b>	144	137	72	131	<b>131</b>	131	125	66	153	<b>153</b>	153	145	76	160	<b>160</b>	160	150	79
<b>TAL 044 M</b> kVA	192	<b>200</b>	200	192	100	175	<b>182</b>	182	175	91	204	<b>212</b>	212	204	106	211	<b>220</b>	220	211	110
kW	154	<b>160</b>	160	154	80	140	<b>146</b>	146	140	73	163	<b>170</b>	170	163	85	169	<b>176</b>	176	169	88

(\*) 12-wire option











## Ratings 60 Hz - 1 800 R.P.M.

kVA / kW - P.F. = 0.8																				
Duty / T° C	Continuous / 40 °C					Continuous / 40 °C					Stand-by / 40 °C					Stand-by / 27 °C				
Class / T° K	H / 125° K					F / 105° K					H / 150° K					H / 163° K				
Phase	3 ph.			1 ph.		3 ph.			1 ph.		3 ph.			1 ph.		3 ph.			1 ph.	
<b>Y</b>	380V	416V	440V	<b>480V</b>		380V	416V	440V	<b>480V</b>		380V	416V	440V	<b>480V</b>		380V	416V	440V	<b>480V</b>	
<b>Δ</b>	220V	240V		240V		220V	240V		240V		220V	240V		240V		220V	240V		240V	
<b>YY (*)</b>	208V				220V	208V				220V	208V				220V	208V				220V
<b>ΔΔ (*)</b>					240V					240V					240V					240V
<b>TAL 044 A</b> kVA	69	76	80	<b>88</b>	46	63	69	73	<b>80</b>	42	73	81	85	<b>93</b>	49	76	84	88	<b>97</b>	51
kW	55	61	64	<b>70</b>	37	50	55	58	<b>64</b>	33.5	58	65	68	<b>74</b>	39	61	67	70	<b>78</b>	41
<b>TAL 044 B</b> kVA	79	87	92	<b>100</b>	52	72	79	84	<b>91</b>	47	84	92	98	<b>106</b>	55	87	96	101	<b>110</b>	57
kW	63	70	74	<b>80</b>	42	58	63	67	<b>73</b>	37.5	67	74	78	<b>85</b>	44	70	77	81	<b>88</b>	46
<b>TAL 044 C</b> kVA	89	98	103	<b>113</b>	59	81	89	94	<b>103</b>	54	94	104	109	<b>120</b>	63	98	108	113	<b>124</b>	65
kW	71	78	82	<b>90</b>	47	65	71	75	<b>82</b>	43	75	83	87	<b>96</b>	50	78	86	90	<b>99</b>	52
<b>TAL 044 D</b> kVA	99	108	115	<b>125</b>	65	90	98	105	<b>114</b>	59	105	114	122	<b>133</b>	69	109	119	127	<b>138</b>	72
kW	79	86	92	<b>100</b>	52	72	78	84	<b>91</b>	47	84	91	98	<b>106</b>	55	87	95	102	<b>110</b>	58
<b>TAL 044 E</b> kVA	124	135	143	<b>156</b>	76	113	123	130	<b>142</b>	69	131	143	152	<b>165</b>	81	136	149	157	<b>172</b>	84
kW	99	108	114	<b>125</b>	61	90	98	104	<b>114</b>	55	105	114	122	<b>132</b>	65	109	119	126	<b>138</b>	67
<b>TAL 044 H</b> kVA	134	146	155	<b>169</b>	81	122	133	141	<b>154</b>	74	142	155	164	<b>179</b>	86	147	161	171	<b>186</b>	89
kW	107	117	124	<b>135</b>	65	98	106	113	<b>123</b>	59	114	124	131	<b>143</b>	69	118	129	137	<b>149</b>	71
<b>TAL 044 J</b> kVA	148	163	172	<b>188</b>	95	135	148	157	<b>171</b>	86	157	173	182	<b>199</b>	101	163	179	189	<b>207</b>	105
kW	118	130	138	<b>150</b>	76	108	118	126	<b>137</b>	69	126	138	146	<b>159</b>	81	130	143	151	<b>166</b>	84
<b>TAL 044 K</b> kVA	165	179	189	<b>206</b>	105	150	163	172	<b>187</b>	96	175	190	200	<b>218</b>	111	182	197	208	<b>227</b>	116
kW	132	143	151	<b>165</b>	84	120	130	138	<b>150</b>	77	140	152	160	<b>174</b>	89	146	158	166	<b>182</b>	93
<b>TAL 044 L</b> kVA	180	195	210	<b>225</b>	113	164	177	191	<b>205</b>	102	191	207	223	<b>239</b>	119	200	215	231	<b>250</b>	124
kW	144	156	168	<b>180</b>	90	131	142	153	<b>164</b>	82	153	166	178	<b>191</b>	95	160	172	185	<b>200</b>	99
<b>TAL 044 M</b> kVA	200	215	230	<b>250</b>	125	182	196	209	<b>228</b>	114	212	228	244	<b>265</b>	133	220	237	253	<b>275</b>	136
kW	160	172	184	<b>200</b>	100	146	157	167	<b>182</b>	91	170	182	195	<b>212</b>	106	176	190	202	<b>220</b>	109











(\*) 12-wire option

# TAL 044 - Three-phase 70 to 200 kVA - 50 Hz / 88 to 250 kVA - 60 Hz

## Efficiencies 400 V - 50 Hz (— P.F.: 0.8) (--- P.F.: 1)

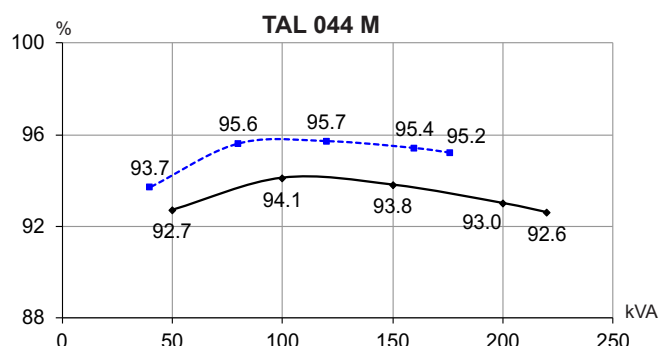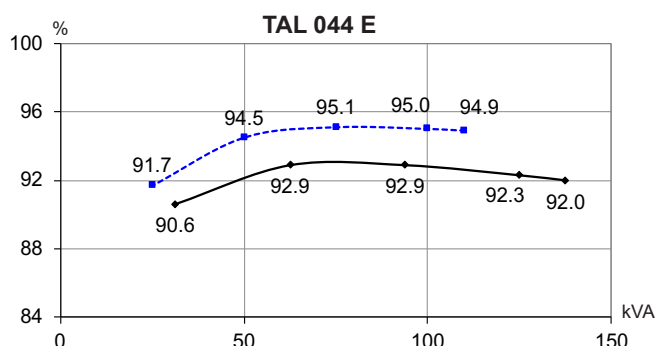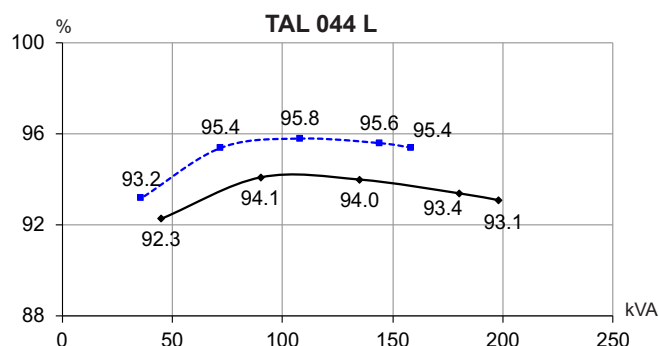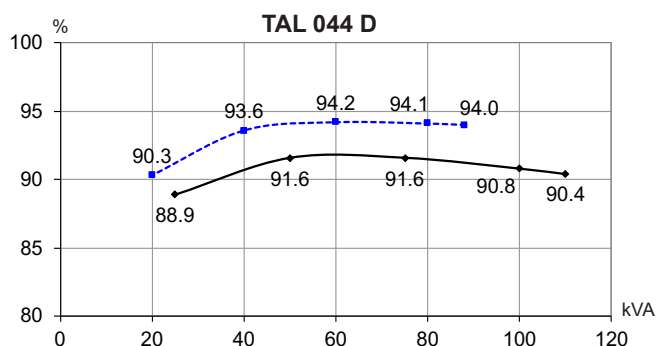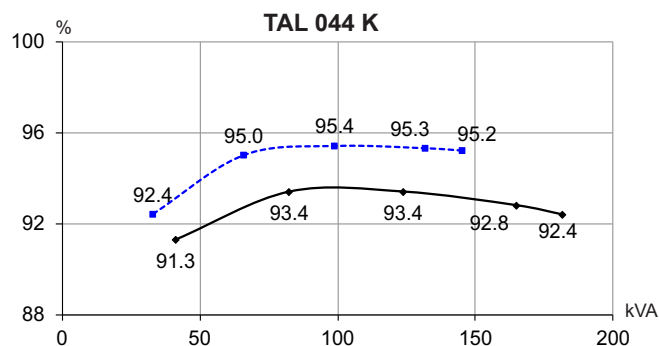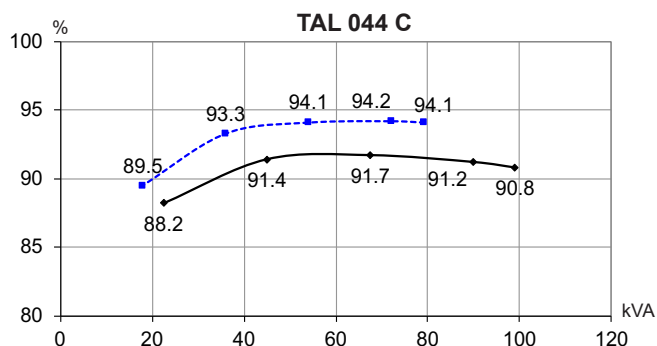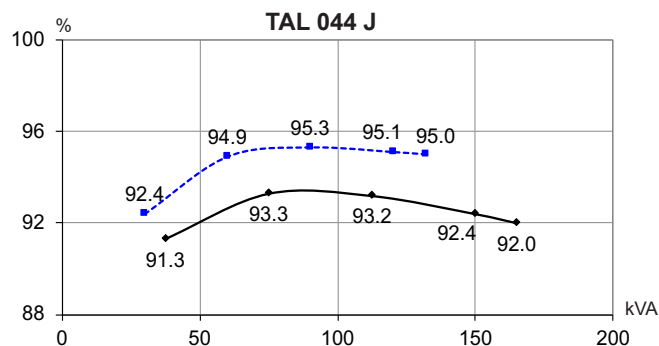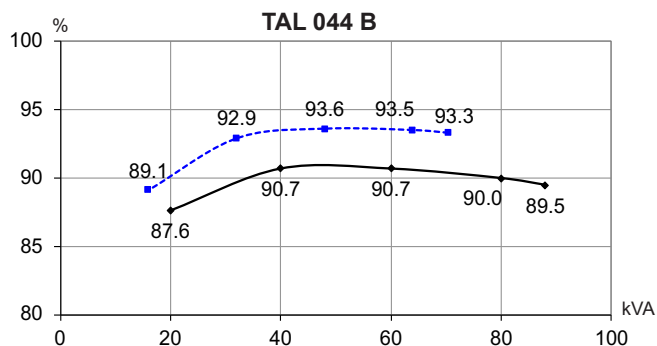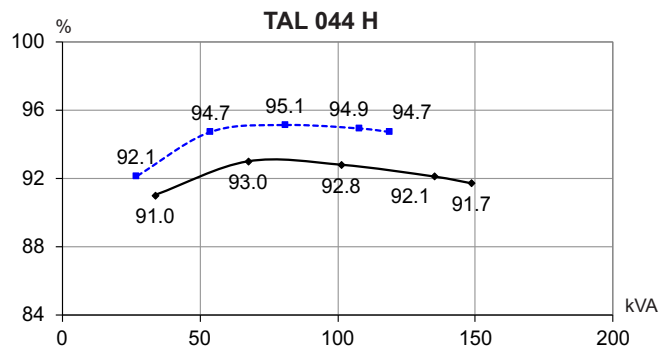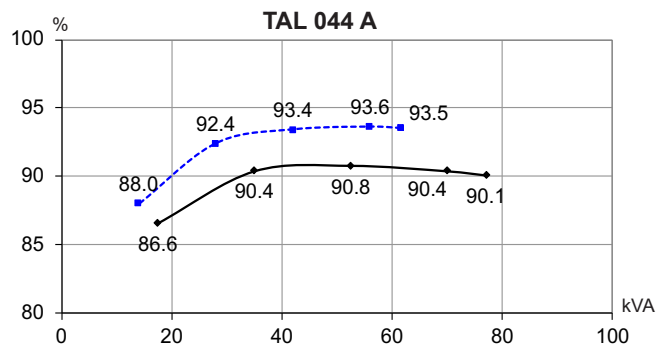

## Efficiencies 480 V - 60 Hz (— P.F.: 0.8) (--- P.F.: 1)

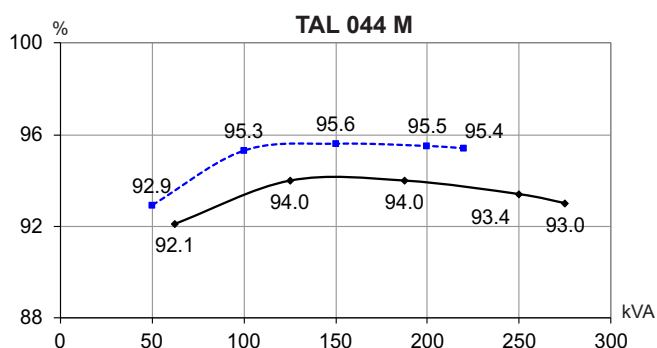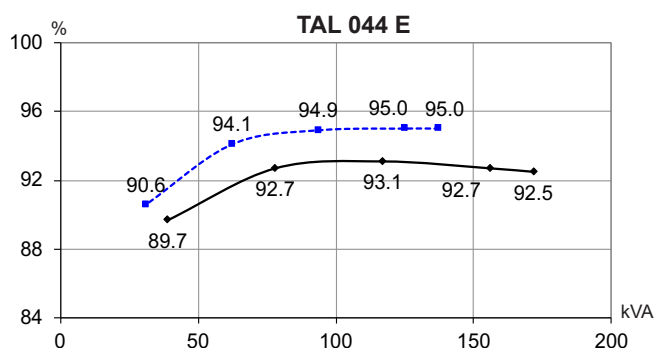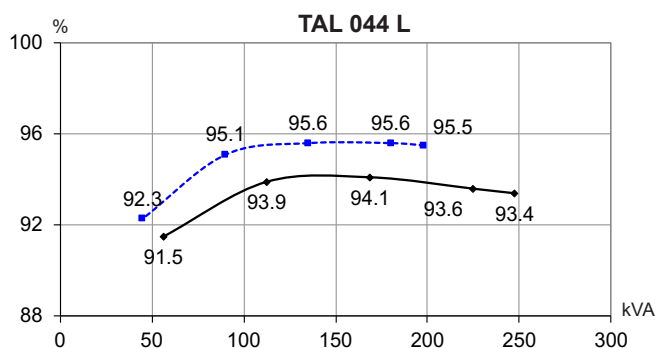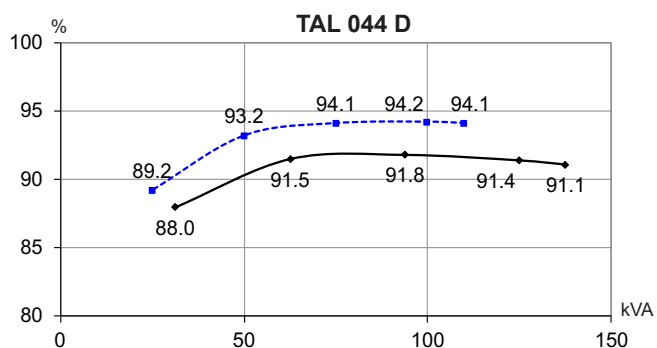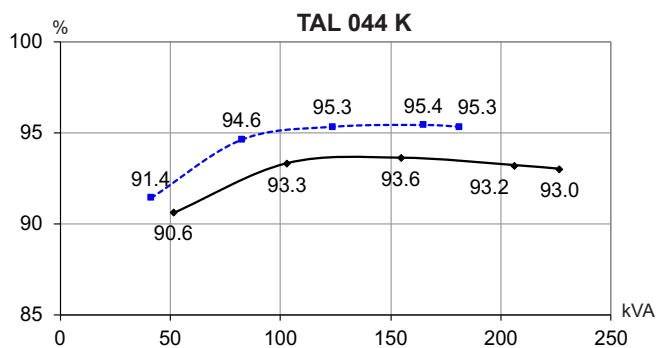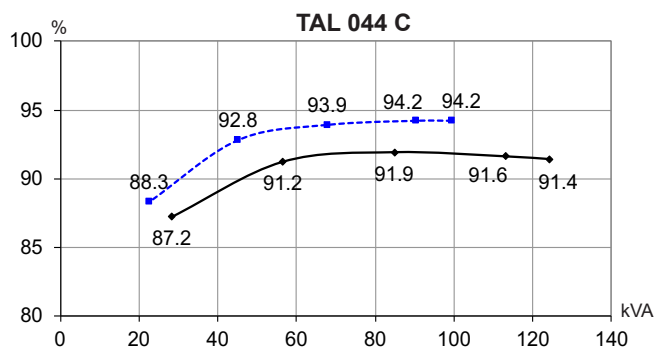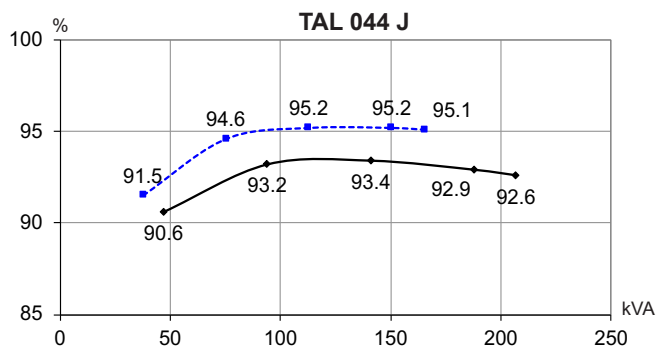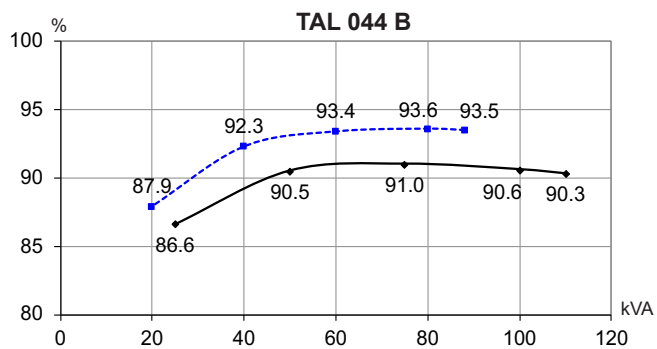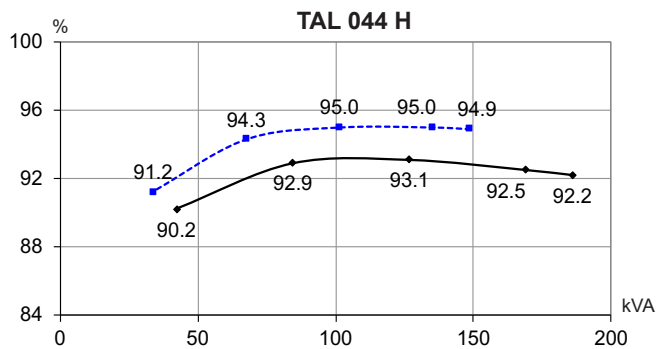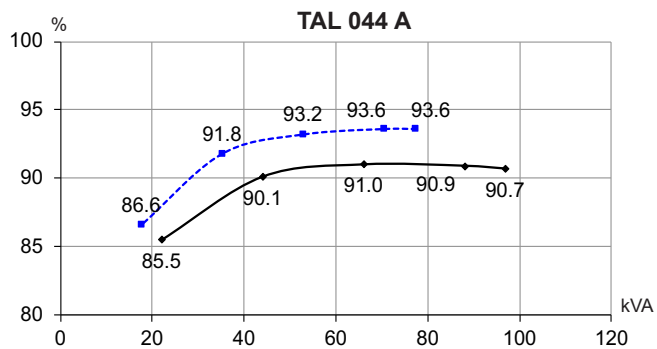

**Reactances (%). Time constants (ms) - Class H / 400 V**

	A	B	C	D	E	H	J	K	L	M
<b>Kcc</b> Short-circuit ratio	0.57	0.5	0.53	0.48	0.43	0.4	0.4	0.42	0.37	0.33
<b>Xd</b> Direct-axis synchronous reactance unsaturated	294	336	307	341	334	361	359	343	343	381
<b>Xq</b> Quadrature-axis synchronous reactance unsaturated	150	171	156	174	170	184	183	175	175	194
<b>T'do</b> No-load transient time constant	2 475	2 475	2 308	2 308	2 154	2 154	2 112	2 077	2 025	2 025
<b>X'd</b> Direct-axis transient reactance saturated	11.9	13.6	13.3	14.7	15.5	16.7	17	16.5	16.9	18.8
<b>T'd</b> Short-circuit transient time constant	100	100	100	100	100	100	100	100	100	100
<b>X''d</b> Direct-axis subtransient reactance saturated	7.1	8.1	7.9	8.8	9.3	10	10.2	9.9	10.1	11.3
<b>T''d</b> Subtransient time constant	10	10	10	10	10	10	10	10	10	10
<b>X''q</b> Quadrature-axis subtransient reactance saturated	16.1	18.3	17	18.9	18.9	20.4	20.4	19.5	19.7	21.9
<b>Xo</b> Zero sequence reactance	0.49	0.56	0.55	0.61	0.64	0.69	0.7	0.68	0.7	0.78
<b>X2</b> Negative sequence reactance saturated	11.62	13.28	12.53	13.92	14.12	15.25	15.31	14.74	14.96	16.62
<b>Ta</b> Armature time constant	15	15	15	15	15	15	15	15	15	15

**Other class H / 400 V data**

<b>io (A)</b> No-load excitation current SHUNT	0.84	0.84	0.80	0.80	0.67	0.67	0.66	0.68	0.64	0.64
<b>io (A)</b> No-load excitation current AREP+	1.08	1.08	1.03	1.03	0.87	0.87	0.85	0.88	0.82	0.82
<b>ic (A)</b> On-load excitation current SHUNT	2.60	2.95	2.75	3.08	2.57	2.78	2.79	2.82	2.69	3.01
<b>ic (A)</b> On-load excitation current AREP+	3.35	3.80	3.54	3.96	3.31	3.59	3.60	3.63	3.46	3.88
<b>uc (V)</b> On-load excitation voltage SHUNT	28.9	32.5	30.1	33.2	31.9	34.3	34.1	34.1	20.1	22.2
<b>uc (V)</b> On-load excitation voltage AREP+	23.2	26.1	24.1	26.7	25.6	27.5	27.4	27.4	15.8	17.5
<b>ms</b> Response time ( $\Delta U = 20\%$ transient)	500	500	500	500	500	500	500	500	500	500
<b>kVA</b> Start ( $\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) SHUNT*	124	124	143	143	204	205	225	254	318	318
<b>kVA</b> Start ( $\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) AREP+*	203	203	233	233	333	334	366	413	542	543
<b>%</b> Transient $\Delta U$ (on-load 4/4) SHUNT - P.F.: 0.8 <sub>LAG</sub>	17.2	18.8	18.5	19.9	18.2	19.1	19.3	18.9	17.3	18.6
<b>%</b> Transient $\Delta U$ (on-load 4/4) AREP+ - P.F.: 0.8 <sub>LAG</sub>	12.5	13.6	13.4	14.4	13.2	13.8	13.9	13.7	12.2	13
<b>W</b> No-load losses	1 980	1 980	2 175	2 175	2 322	2 322	2 478	2 785	2 665	2 665
<b>W</b> Heat dissipation	5 903	7 091	6 931	8 053	8 255	9 254	9 769	10 184	10 134	11 898

\* P.F. = 0.6

**Reactances (%). Time constants (ms) - Class H / 480 V**







	A	B	C	D	E	H	J	K	L	M
<b>Kcc</b> Short-circuit ratio	0.55	0.48	0.5	0.46	0.41	0.38	0.38	0.41	0.36	0.32
<b>Xd</b> Direct-axis synchronous reactance unsaturated	308	350	321	355	348	377	375	356	358	397
<b>Xq</b> Quadrature-axis synchronous reactance unsaturated	157	178	164	181	177	192	191	182	182	202
<b>T'do</b> No-load transient time constant	2 475	2 475	2 308	2 308	2 154	2 154	2 112	2 077	2 025	2 025
<b>X'd</b> Direct-axis transient reactance saturated	12.4	14.1	13.9	15.4	16.1	17.5	17.7	17.1	17.6	19.6
<b>T'd</b> Short-circuit transient time constant	100	100	100	100	100	100	100	100	100	100
<b>X''d</b> Direct-axis subtransient reactance saturated	7.4	8.5	8.3	9.2	9.7	10.5	10.6	10.3	10.6	11.7
<b>T''d</b> Subtransient time constant	10	10	10	10	10	10	10	10	10	10
<b>X''q</b> Quadrature-axis subtransient reactance saturated	16.8	19.1	17.8	19.7	19.6	21.3	21.3	20.3	20.5	22.8
<b>Xo</b> Zero sequence reactance	0.51	0.59	0.58	0.64	0.67	0.72	0.74	0.71	0.73	0.81
<b>X2</b> Negative sequence reactance saturated	12.17	13.83	13.1	14.49	14.69	15.91	15.99	15.34	15.59	17.32
<b>Ta</b> Armature time constant	15	15	15	15	15	15	15	15	15	15

**Other class H / 480 V data**

<b>io (A)</b> No-load excitation current SHUNT	0.84	0.84	0.79	0.79	0.67	0.67	0.66	0.68	0.63	0.63
<b>io (A)</b> No-load excitation current AREP+	1.08	1.08	1.02	1.02	0.87	0.87	0.85	0.87	0.82	0.82
<b>ic (A)</b> On-load excitation current SHUNT	2.60	2.91	2.72	3.01	2.58	2.79	2.79	2.79	2.69	3.00
<b>ic (A)</b> On-load excitation current AREP+	3.34	3.76	3.51	3.88	3.32	3.59	3.60	3.59	3.47	3.87
<b>uc (V)</b> On-load excitation voltage SHUNT	29.3	32.6	30.3	33.3	32.4	34.8	34.7	34.4	20.4	22.6
<b>uc (V)</b> On-load excitation voltage AREP+	23.5	26.2	24.4	26.7	26	28	27.8	27.6	16.1	17.8
<b>ms</b> Response time ( $\Delta U = 20\%$ transient)	500	500	500	500	500	500	500	500	500	500
<b>kVA</b> Start ( $\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) SHUNT*	149	150	172	172	246	246	270	304	381	381
<b>kVA</b> Start ( $\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) AREP+*	244	244	279	281	401	402	438	498	648	650
<b>%</b> Transient $\Delta U$ (on-load 4/4) SHUNT - P.F.: 0.8 <sub>LAG</sub>	17.7	19.3	19.1	20.4	18.6	19.7	19.9	19.4	17.8	19.1
<b>%</b> Transient $\Delta U$ (on-load 4/4) AREP+ - P.F.: 0.8 <sub>LAG</sub>	12.9	14	13.8	14.7	13.5	14.2	14.3	14	12.5	13.4
<b>W</b> No-load losses	2 905	2 905	3 189	3 189	3 417	3 417	3 639	4 070	3 923	3 923
<b>W</b> Heat dissipation	7 042	8 265	8 222	9 378	9 683	10 805	11 438	11 913	12 145	14 130







\* P.F. = 0.6

Transient voltage variation 400V - 50 Hz

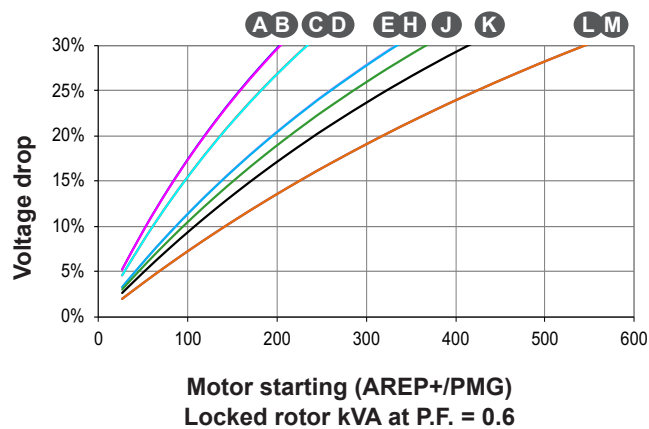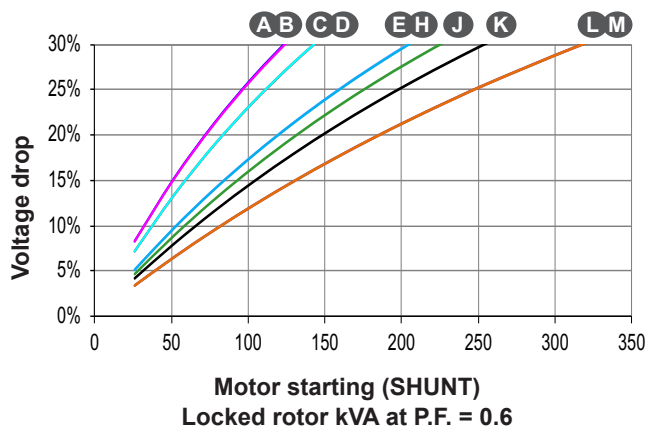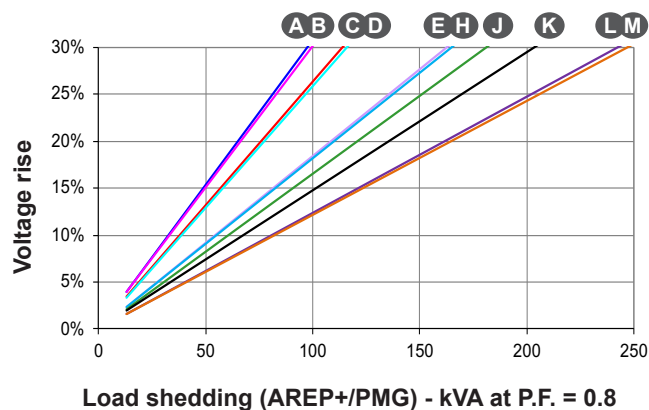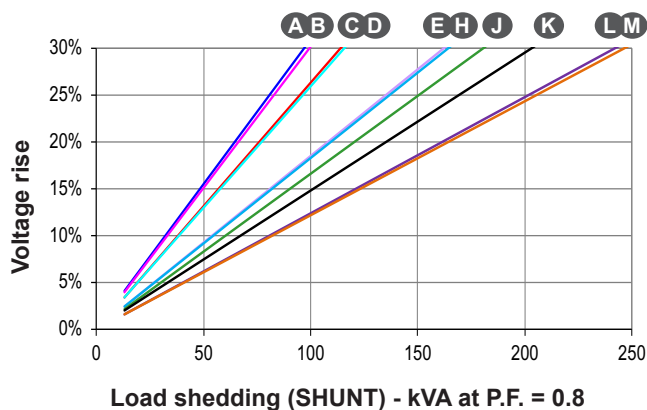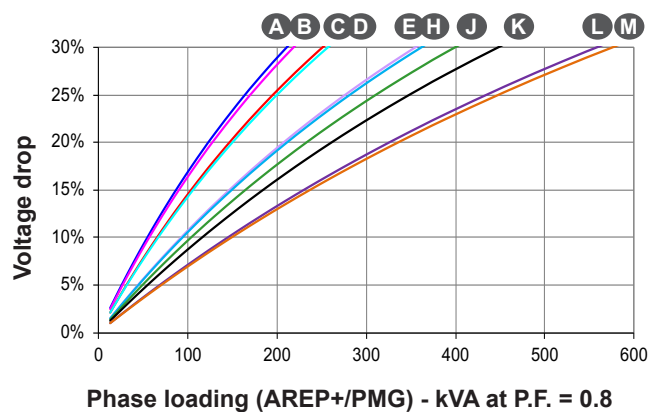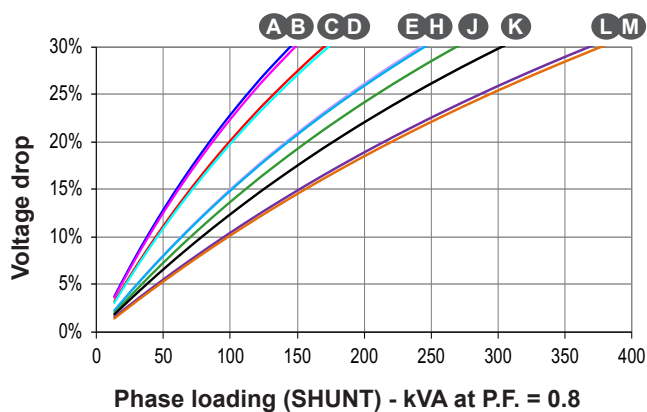

- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by  $K = \text{Sine P.F.} / 0.8$
- 2) For voltages other than 400V (Y), 230V ( $\Delta$ ) at 50 Hz, then kVA must be multiplied by  $(400/U)^2$  or  $(230/U)^2$ .

Transient voltage variation 480V - 60 Hz

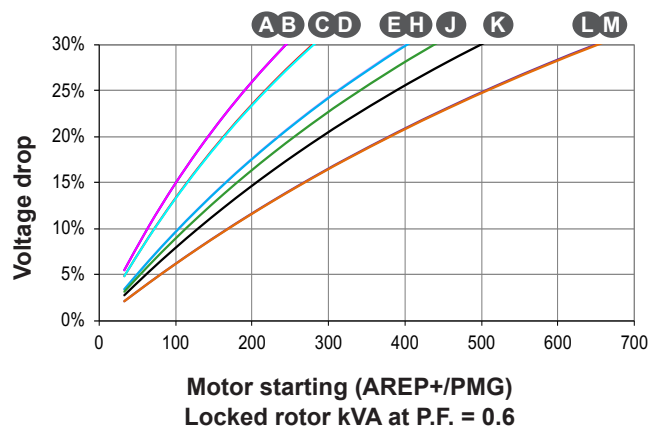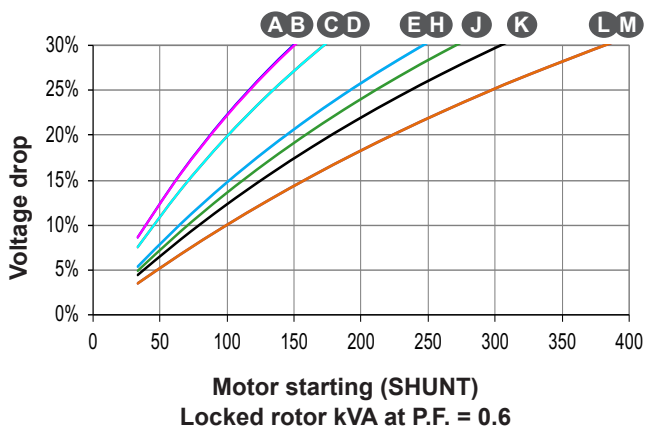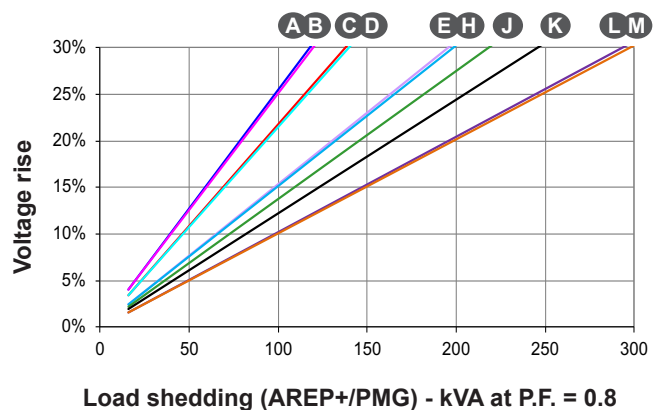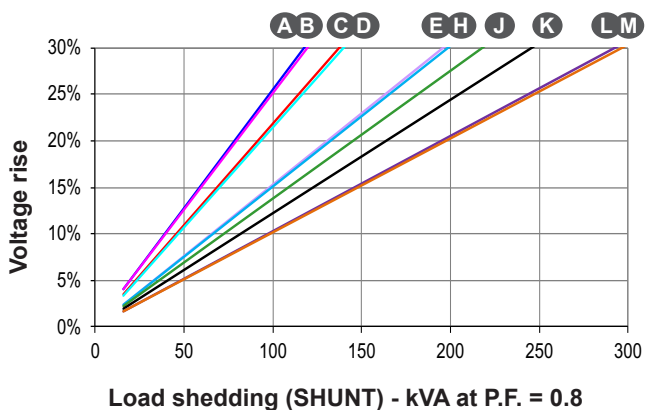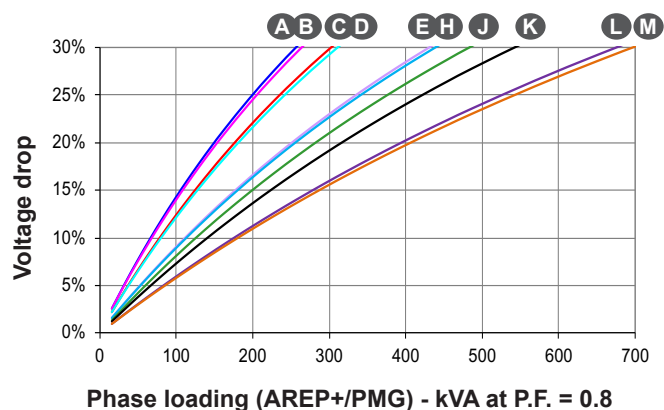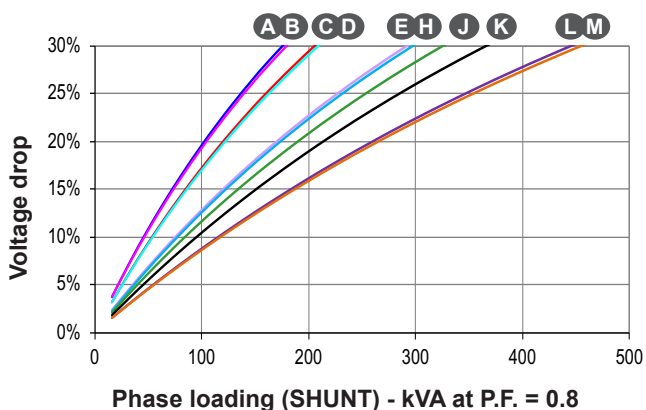


- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by  $K = \text{Sine P.F.} / 0.8$
- 2) For voltages other than 480V (Y), 277V ( $\Delta$ ), 240V (YY) at 60 Hz, then kVA must be multiplied by  $(480/U)^2$  or  $(277/U)^2$  or  $(240/U)^2$ .

3-phase short-circuit curves at no load and rated speed (star connection Y)


**TAL 044 A**

Symmetrical —  
Asymmetrical - - -

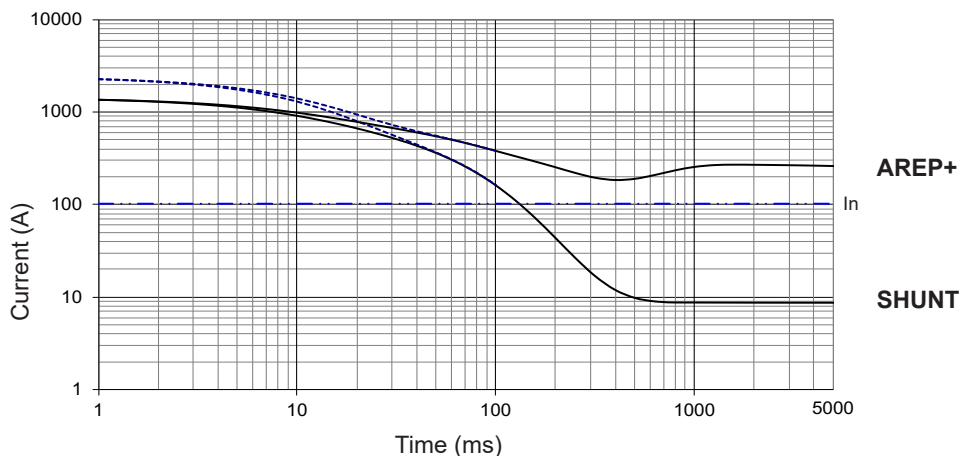


**TAL 044 B**

Symmetrical —  
Asymmetrical - - -

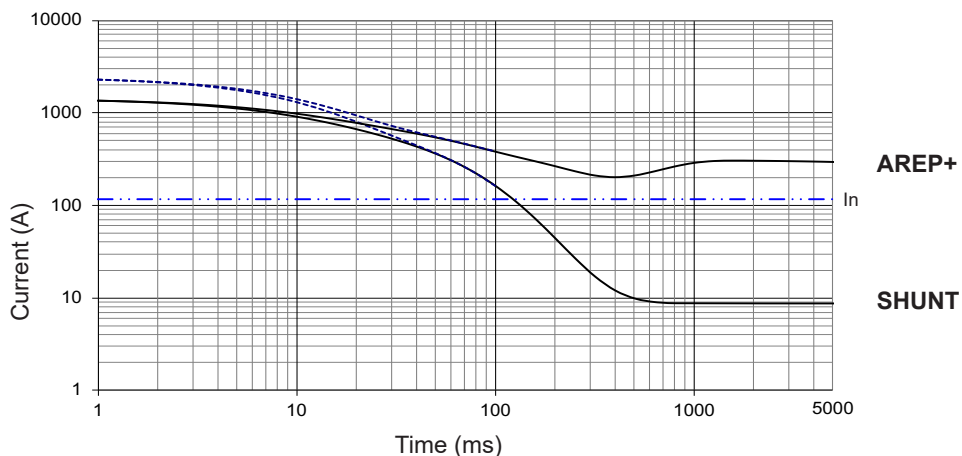

**TAL 044 C**

Symmetrical —  
Asymmetrical - - -

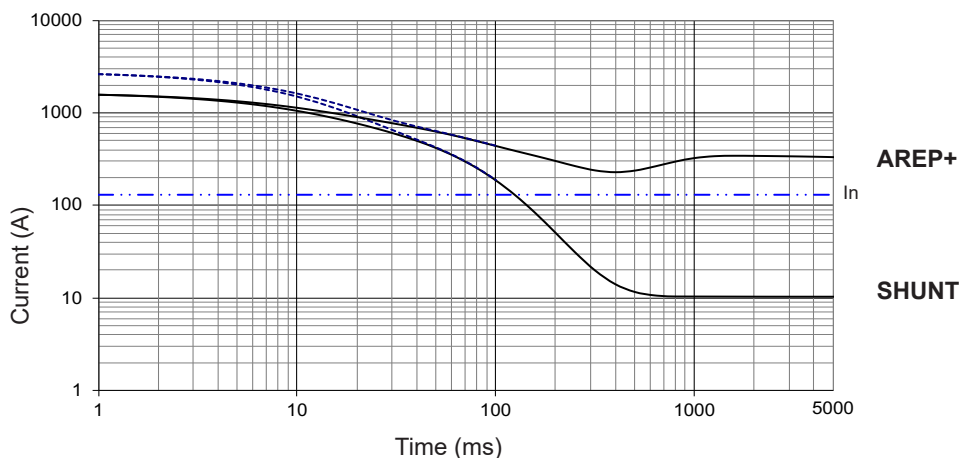


**Influence due to connection**

For (Δ) connection, use the following multiplication factor:  
- Current value x 1.732.

3-phase short-circuit curves at no load and rated speed (star connection Y)


**TAL 044 D**

Symmetrical —  
Asymmetrical - - -

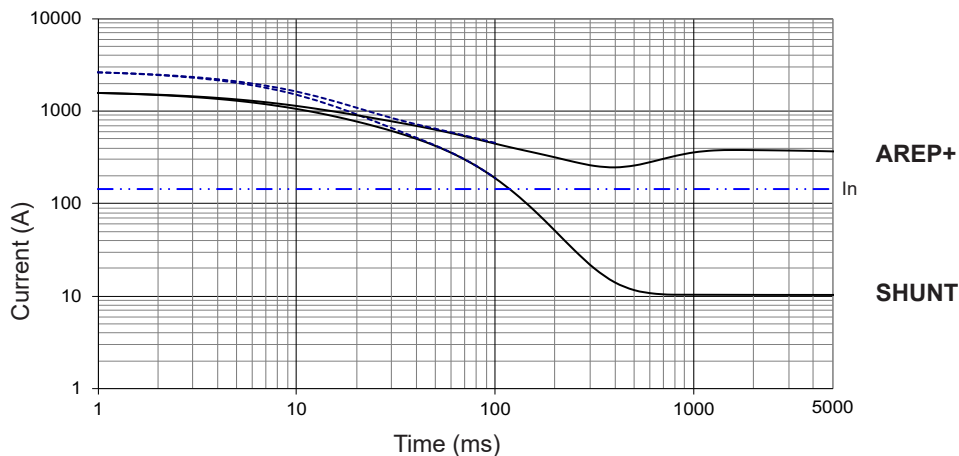


**TAL 044 E**

Symmetrical —  
Asymmetrical - - -

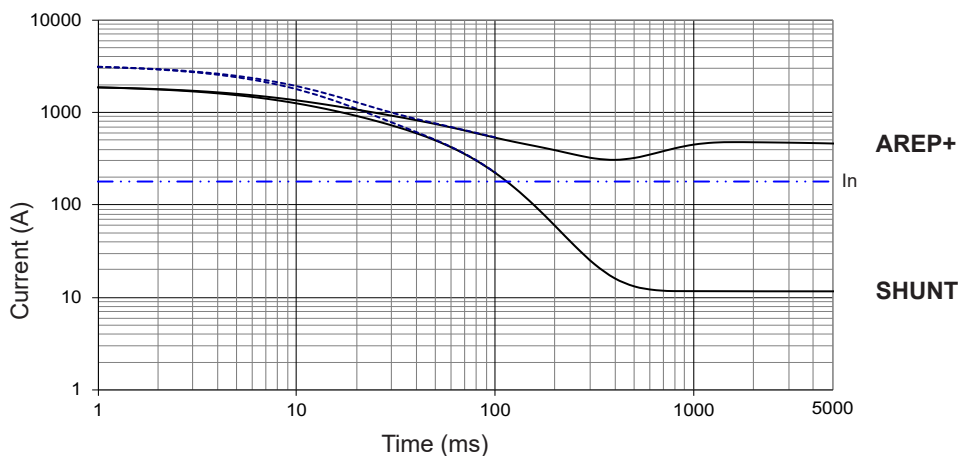

**TAL 044 H**

Symmetrical —  
Asymmetrical - - -

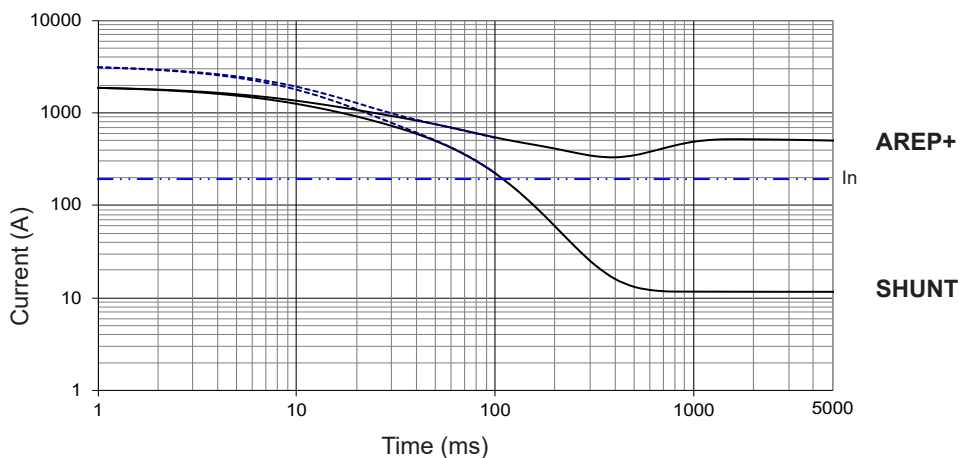

**Influence due to short-circuit**


Curves are based on a three-phase short-circuit.  
For other types of short-circuit,  
use the following multiplication factors.

	3 - phase	2 - phase L / L	1 - phase L / N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP+/PMG)		1.5	

3-phase short-circuit curves at no load and rated speed (star connection Y)


**TAL 044 J**

Symmetrical —  
Asymmetrical - - -

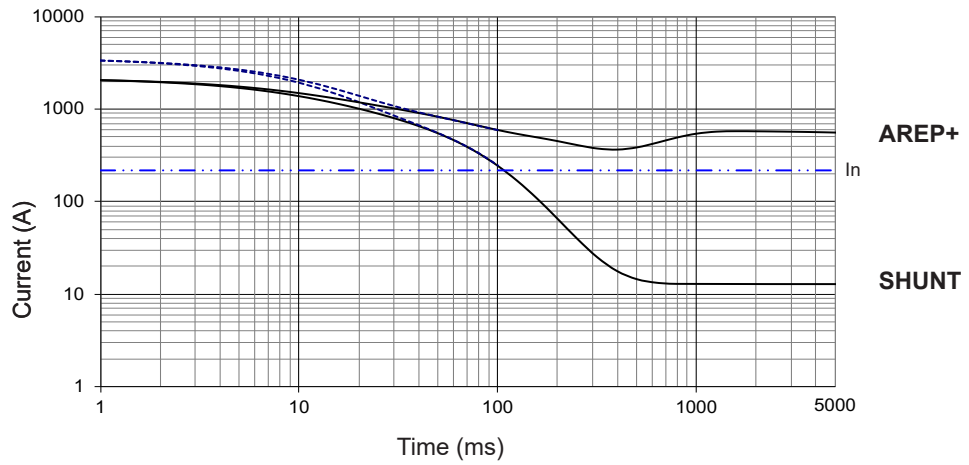

**TAL 044 K**

Symmetrical —  
Asymmetrical - - -

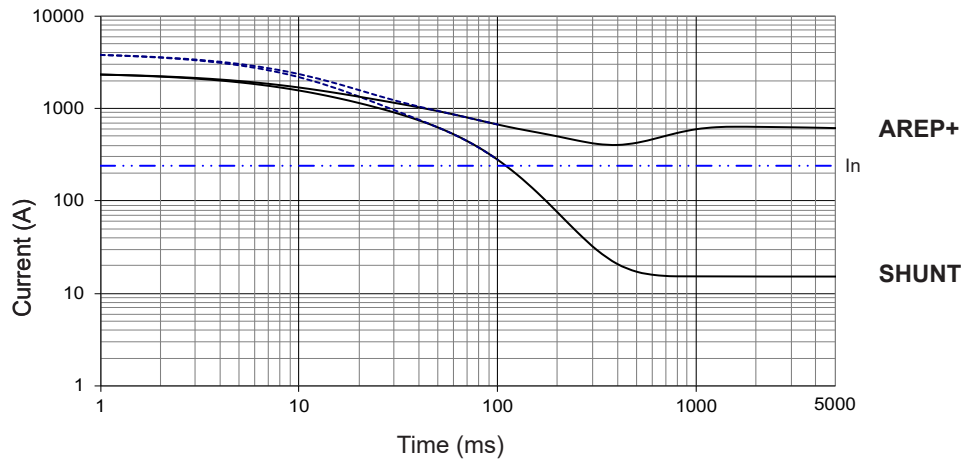


**Influence due to connection**

For (Δ) connection, use the following multiplication factor:  
- Current value x 1.732.

3-phase short-circuit curves at no load and rated speed (star connection Y)


**TAL 044 L**

Symmetrical —  
Asymmetrical - - -

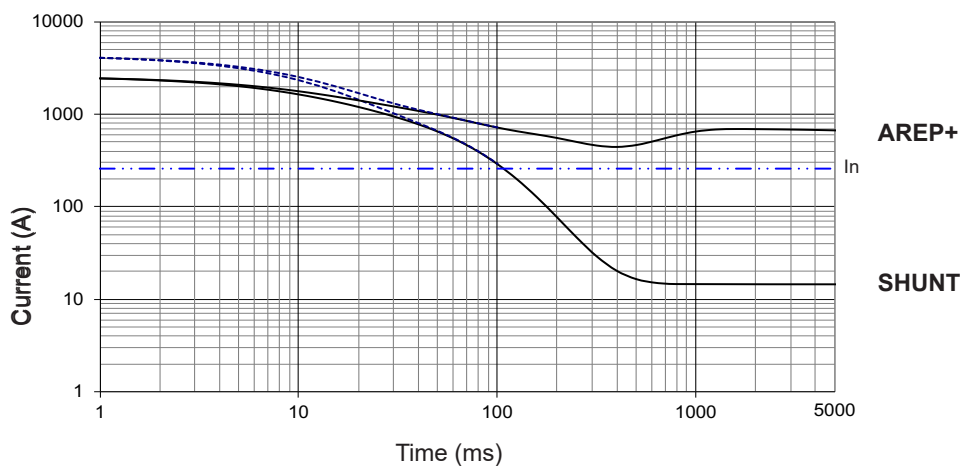

**TAL 044 M**

Symmetrical —  
Asymmetrical - - -

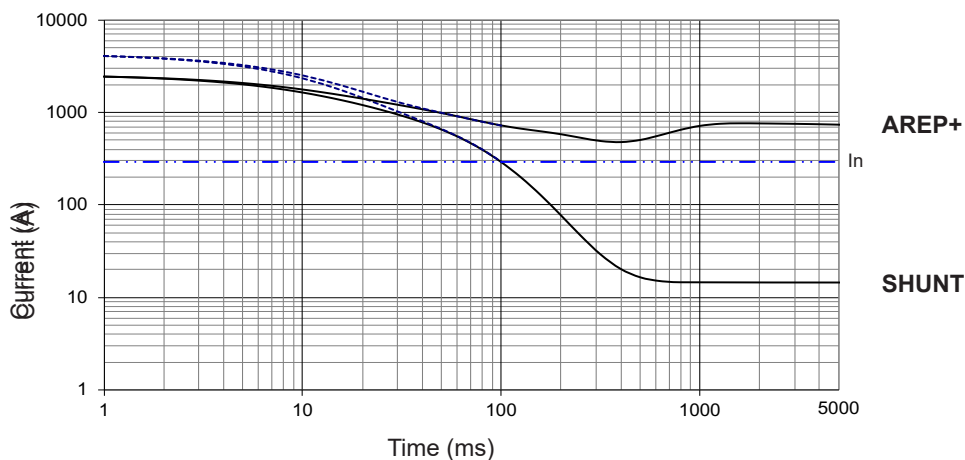

**Influence due to short-circuit**

Curves are based on a three-phase short-circuit.  
For other types of short-circuit,  
use the following multiplication factors.

	3 - phase	2 - phase L / L	1 - phase L / N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP+/PMG)		1.5	


# TAL 044 - Dedicated single-phase 57 to 82 kVA - 50 Hz / 80 to 125 kVA - 60 Hz

## General characteristics

Insulation class	H	Excitation system	SHUNT
Winding pitch	2/3 (wind. M 50 Hz, M1 60 Hz)	AVR type	R121
Number of wires	4	Voltage regulation (*)	± 1 %
Protection	IP 23	Total Harmonic Distortion THD (**) in no-load	< 3.5 %
Altitude	≤ 1 000 m	Total Harmonic Distortion THD (**) in linear load	< 5 %
Overspeed	2 250 R.P.M.	Waveform: NEMA = TIF (**)	< 100
Air flow	0.25 m <sup>3</sup> /s (50 Hz) / 0.30 m <sup>3</sup> /s (60 Hz)	Waveform: I.E.C. = FHT (**)	< 2 %


(\*) Steady state (\*\*) Total harmonic distortion between phases, no-load or on-load (non-distorting)

## Ratings / Efficiencies 50 Hz - 1 500 R.P.M. - Winding M

kVA / kW - P.F. = 1(*)						
Duty / T° C	Continuous / 40 °C			Stand-by / 40 °C	Stand-by / 27 °C	
Class / T° K	H / 125° K	F / 105° K	H / 150° K	H / 163° K		
Serie (SE) 	230 V	η %	230 V	230 V	230V	η %
TAL 044 C	57	91	52	60	63	90.7
TAL 044 D1	69	91.5	63	73	76	91.1
TAL 044 E	-	-	-	-	-	-
TAL 044 J	82	92.3	75	87	90	92
TAL 044 K	-	-	-	-	-	-


(\*) For P.F. 0.8: derating 15%

## Ratings / Efficiencies 60 Hz - 1 800 R.P.M. - Winding M1


kVA / kW - P.F. = 1(*)						
Duty / T° C	Continuous / 40 °C			Stand-by / 40 °C	Stand-by / 27 °C	
Class / T° K	H / 125° K	F / 105° K	H / 150° K	H / 163° K		
Serie (SE) 	240 V	η %	240 V	240 V	240V	η %
TAL 044 C	80	90	73	85	88	89.7
TAL 044 D1	100	90	91	106	110	89.7
TAL 044 E	115	90.7	105	122	127	90.2
TAL 044 J	-	-	-	-	-	-
TAL 044 K	125	91.7	114	133	138	91.4

(\*) For P.F. 0.8: derating 15%

## Starting motor 230V - 50Hz

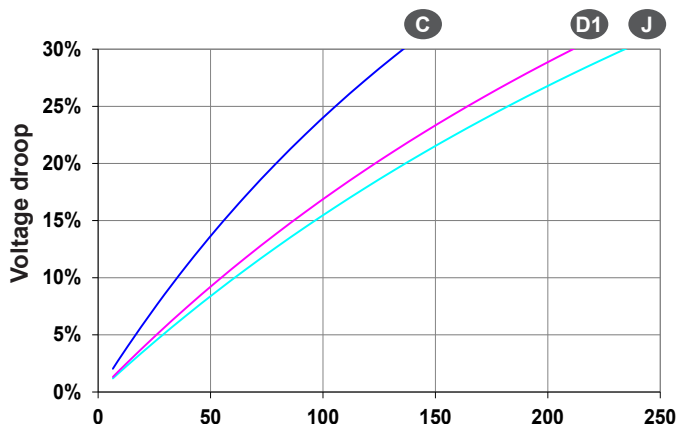


## Starting motor 240V - 60Hz

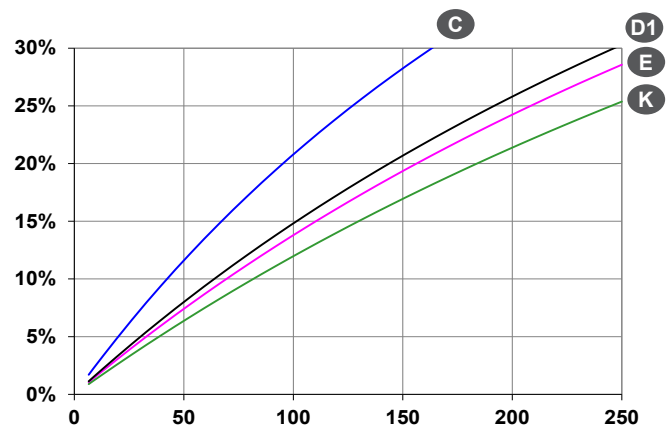

Locked rotor kVA at PF : 0.9

Single-bearing dimensions

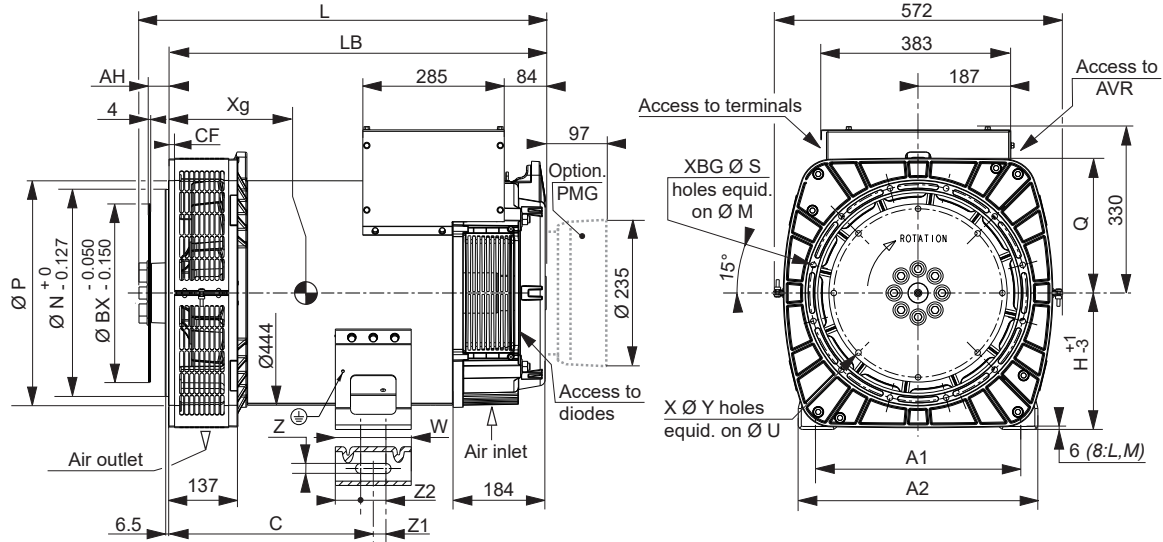

Dimensions (mm) and weight (kg)				
Type	L maxi *	LB	Xg	Weight
TAL 044 A	758	677	293	247
TAL 044 B	758	677	293	247
TAL 044 C	758	677	313	280
TAL 044 D	758	677	313	280
TAL 044 D1	758	677	333	313
TAL 044 E	828	747	353	353
TAL 044 H	828	747	353	353
TAL 044 J	828	747	365	383
TAL 044 K	868	787	383	418
TAL 044 L	953	872	416	539
TAL 044 M	953	872	416	539

\* L maxi = LB + AH maxi + 19

Flange (mm)							
S.A.E.	P	N	M	S	XBG	Q	CF
4	400	361.95	381	11	12	267	16
3	445	409.58	428.62	11	12	267	16/17*
2	485	447.68	466.72	11	12	267	16/17*
1	560.5/581*	511.18	530.23	12	10	280/290*	4.5/10*

\* Specific dimension TAL 044 L and M


Shaft height (mm)				Coupling				
H	Standard		Option	Flex plate	1	2	3	4
	270	225*	280**					
C	405	332.5	429	14	x	-	-	-
A1	406	356	457	11 1/2	x	x	x	-
A2	474/490**	430	541	8	-	-	x	x
Z	20	14.5	20					
Z1	25	20	25					
Z2	50	40	50					
W	150	120	150					

\* Not available for L and M

\*\* Available only for L and M

Flex plate (mm)					
S.A.E.	BX	U	X	Y	AH
14	466.72	438.15	8	14	25.4
11 1/2	352.42	333.38	8	11	39.6
10	314.32	295.28	8	11	53.8
8	263.52	244.48	6	11	62

Torsional analysis data

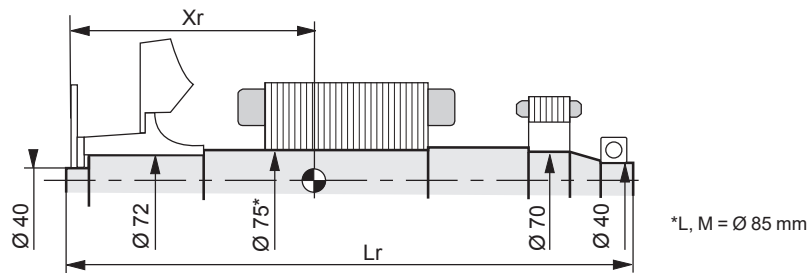

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm²): (4J = MD²)																
Flex plate	S.A.E. 8				S.A.E. 10				S.A.E. 11 1/2				S.A.E. 14			
	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J
TAL 044 A	352.4	727	107.1	0.739	362.4	719	107.2	0.753	349.3	704	106.8	0.769	298.6	711	113.8	0.899
TAL 044 B	352.4	727	107.1	0.739	362.4	719	107.2	0.753	349.3	704	106.8	0.769	298.6	711	113.8	0.899
TAL 044 C	362.5	727	120.9	0.863	353.2	719	121.0	0.877	340.3	704	120.6	0.893	310.0	711	127.6	1.023
TAL 044 D	362.5	727	120.9	0.863	353.2	719	121.0	0.877	340.3	704	120.6	0.893	310.0	711	127.6	1.023
TAL 044 D1	362.5	727	120.9	0.863	353.2	719	121.0	0.877	340.3	704	120.6	0.893	310.0	711	127.6	1.023
TAL 044 E	408.5	797	153.6	1.137	398.5	789	153.7	1.151	385.4	774	153.3	1.167	357.3	781	160.2	1.297
TAL 044 H	408.5	797	153.6	1.137	398.5	789	153.7	1.151	385.4	774	153.3	1.167	357.3	781	160.2	1.297
TAL 044 J	419.4	797	165.4	1.244	409.3	789	165.5	1.258	396.2	774	165.1	1.274	368.8	781	172.0	1.404
TAL 044 K	439.4	837	180.7	1.379	429.2	829	180.8	1.393	416.0	814	180.4	1.409	389.2	821	187.4	1.539
TAL 044 L	480.9	922	221.1	1.713	471.3	914	221.2	1.727	458.3	899	220.8	1.743	449.6	906	227.8	1.873
TAL 044 M	480.9	922	221.1	1.713	471.3	914	221.2	1.727	458.3	899	220.8	1.743	449.6	906	227.8	1.873

NOTE : Dimensions are for information only and may be subject to modifications. The torsional analysis of the transmission is imperative. All values are available upon request.



[www.nidecpower.com](http://www.nidecpower.com)

Connect with us at:



© 2026 Moteurs Leroy-Somer SAS. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Moteurs Leroy-Somer SAS have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Headquarters: Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France. Share Capital: 32,239,235 €, RCS Angoulême 338 567 258.